





Bearing No.		Dimensions (mm)											Weight(kg)
ISO	GOST	d	D	Bi	Be	r	n	m	G	ds	T	W	
UC201	480201	12	47	31,0	17	1,0	12,7	18,3	4,50	M6 x 0,75	4,5	29,0	0,200
UC202	480202	15	47	31,0	17	1,0	12,7	18,3	4,50	M6 x 0,75	4,5	29,0	0,190
UC203	480203	17	47	31,0	17	1,0	12,7	18,3	4,50	M6 x 0,75	4,5	29,0	0,170
UC204	480204	20	47	31,0	17	1,5	12,7	18,3	4,50	M6 x 0,75	4,5	29,0	0,148
UC205	480205	25	52	34,0	17	1,5	14,3	19,7	5,00	M6 X 0,75	4,5	34,0	0,182
UC206	480206	30	62	38,1	19	1,5	15,9	22,2	5,00	M6 x 0,75	5,1	40,5	0,310
UC207	480207	35	72	42,9	20	2,0	17,5	25,4	6,00	M8 x 1,00	5,8	48,0	0,428
UC208	480208	40	80	49,2	21	2,0	19,0	30,2	8,00	M8 x 1,00	6,2	53,0	0,578
UC209	480209	45	85	49,2	22	2,0	19,0	30,2	8,00	M8 x 1,00	6,5	57,3	0,668
UC210	480210	50	90	51,6	23	2,0	19,0	32,6	9,00	M10x 1,25	6,5	63,0	0,722
UC211	480211	55	100	55,6	24	2,5	22,2	33,4	9,00	M10x1,25	7,3	70,0	0,982
UC212	480212	60	110	65,1	26	2,5	25,4	39,7	10,0	M10x1,25	7,7	77,0	1,376
UC213	480213	65	120	65,1	27	2,5	25,4	39,7	10,0	M10x1,25	8,3	82,1	1,704
UC214	480214	70	125	74,6	29	2,5	30,2	44,4	12,0	M12x1,50	8,7	87,0	1,968
UC215	480215	75	130	77,8	30	2,5	33,3	44,5	12,0	M12x1,50	9,2	91,5	2,210
UC216	480216	80	140	82,6	32	3,0	33,3	49,3	12,0	M12x1,50	9,6	98,5	2,860
UC217	480217	85	150	85,7	34	3,0	34,1	51,6	12,0	M12x1,50	11,0	105,0	3,536
UC218	480218	90	160	96,0	36	3,0	39,7	56,3	12,0	M12x1,50	11,0	111,5	4,204

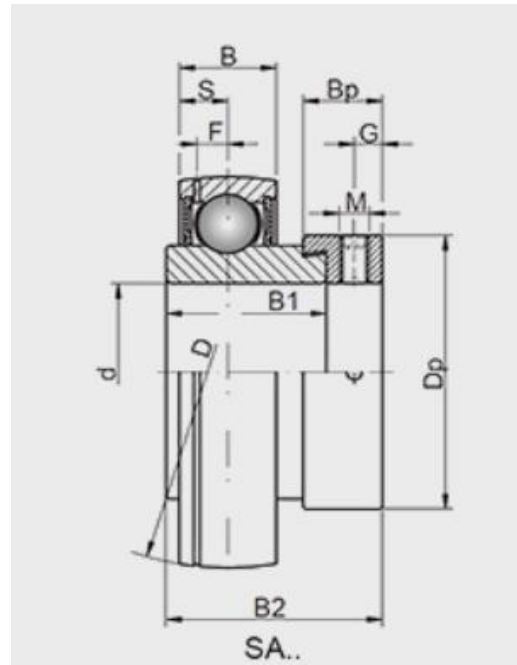

Bearing No.	Dimensions (mm inch)										Dynamic	Static	weight
ISO	d	D	B2	B1	B	S	Bolt size	G	Bp	Dp	Cr	Cor	kg
SA201	12	40	28.6	19.1	12	6.5	M6×0.75	4.8	13.5	28.6	7360	4480	0.12
SA202	15	47	28.6	19.1	12	6.5	M6×0.75	4.8	13.5	28.6	7360	4480	0.1
SA203	17	47	28.6	19.1	12	6.5	M6×0.75	4.8	13.5	28.6	7360	4480	0.09
SA204	20	47	31	21.5	14	7.5	M6×0.75	4.8	13.5	33.3	9880	6200	0.16
SA205	25	52	31	21.5	15	7.5	M6×0.75	4.8	13.5	38.1	10780	6980	0.2
SA206	30	62	35.7	23.8	16	9	M6×0.75	6	15.9	44.5	14970	10040	0.3
SA207	35	72	38.9	25.4	17	9.5	M8×1	6.8	17.5	55.6	19750	13670	0.42
SA208	40	80	43.7	30.2	18	11	M8×1	6.8	18.3	60.3	22710	15940	0.6
SA209	45	85	43.7	30.2	19	11	M8×1	6.8	18.3	63.5	24360	17710	0.76
SA210	50	90	43.7	30.2	20	11	M8×1	6.8	18.3	69.9	26980	19840	0.91
SA211	55	100	48.4	32.5	21	12	M8×1	8	20.7	76.2	33370	25110	1.26
SA212	60	110	53.1	37.2	22	13.5	M10×1	8	22.3	84.2	36740	27970	1.7

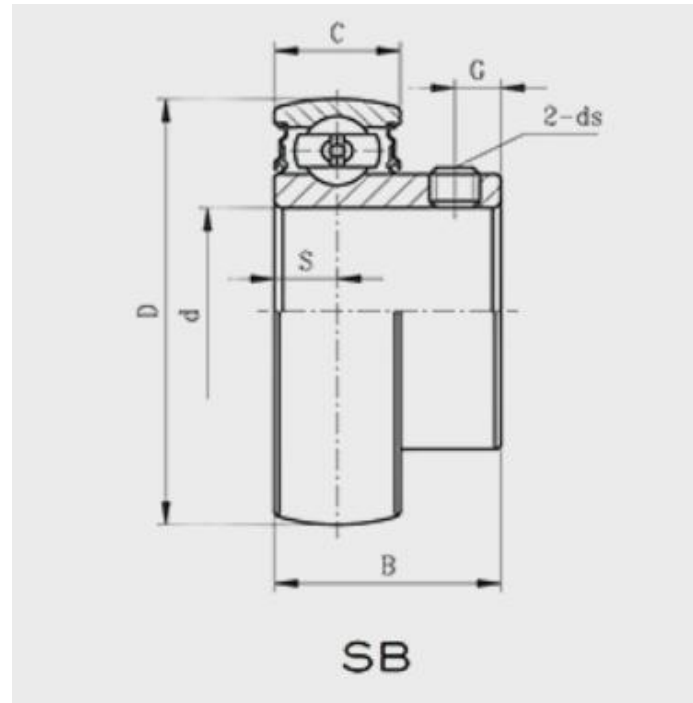

Bearing No.	Dimensions(mm)							Basic Load Rating	Basic Static Load rating	Weight
ISO	d	D	C	S	B	G	ds	(kg)	(kg)	(kg)
SB202	15	40	13	6,5	23	5,0	M5x0,8	750	488	0,10
SB203	17	40	13	6,5	23	5,0	M5x0,8	750	488	0,10
SB204	20	47	14	7,0	25	5,0	M6x1,0	1010	679	0,15
SB205	25	52	15	7,5	27	5,5	M6x1,0	1100	804	0,18
SB206	30	62	16	8,0	29	6,0	M6x1,0	1530	1143	0,27
SB207	35	72	18	9,0	32	6,0	M6x1,0	2020	1551	0,42
SB208	40	80	19	9,5	34	7,0	M8x1,0	2280	1857	0,60
SB209	45	85	20	10,0	36	8,0	M8x1,0	2570	2122	0,73
SB210	50	90	21	11,0	38	8,0	M8x1,0	2750	2367	0,80
SB211	55	100	23	12,0	41	9,0	M10x1,25	3400	2980	1,10