



SHANDONG FODA BEARING TRANSMISSION CO.,LTD

紧定套


Adapter sleeve





◆ 产品参数

Product Parameters

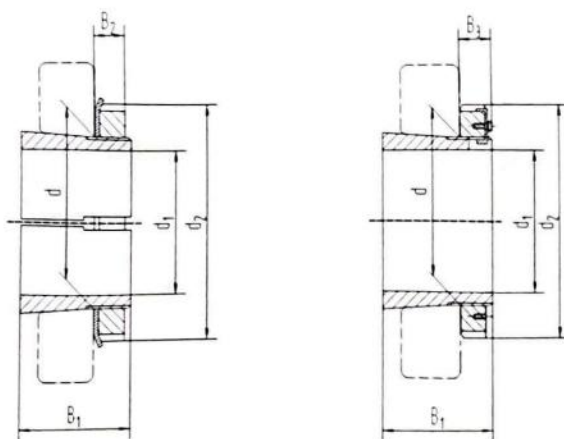


型号 Unit No.	主要尺寸 Dimentions						适用轴承型号 Appropriate bearing(s)				重量
	d	d ₁	B ₁	d ₂	B ₂	B ₃	调心球轴承 Selg-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
	mm										Kg
H 205	25	20	26	38	8	—	—	1205K	—	—	0.064
H 206	30	25	27	45	8	—	—	1206K	—	—	0.086
H 207	35	30	29	52	9	—	—	1207K	—	—	0.12
H 208	40	35	31	58	10	—	—	1208K	—	—	0.16
H 209	45	40	33	65	11	—	—	1209K	—	—	0.21
H 210	50	45	35	70	12	—	—	1210K	—	—	0.24
H 211	55	50	37	75	12	—	—	1211K	—	—	0.28
H 212	60	55	38	80	13	—	—	1212K	—	—	0.31
H 213	65	60	40	85	14	—	—	1213K	—	—	0.36
H 214	70	60	41	92	14	—	—	1214K	—	—	0.55
H 215	75	65	43	98	15	—	—	1215K	—	—	0.66
H 216	80	70	46	105	17	—	—	1216K	—	—	0.81
H 217	85	75	50	110	18	—	—	1217K	—	—	0.94
H 218	90	80	52	120	18	—	—	1218K	—	—	1.1
H 219	95	85	55	125	19	—	—	1219K	—	—	1.25
H 220	100	90	58	130	20	—	—	1220K	—	—	1.4
H 221	105	95	60	140	20	—	—	1221K	—	—	1.6
H 222	110	100	63	145	21	—	—	1222K	—	—	1.8
H 3024	120	110	72	145	22	—	—	—	23024K	—	1.8
H 3026	130	115	80	155	23	—	—	—	23026K	—	2.8
H 3028	140	125	82	165	24	—	—	—	23028K	—	3.05
H 3030	150	135	87	180	26	—	—	—	23030K	—	3.75
H 3032	160	140	93	190	28	—	—	—	23032K	—	5.1



◆ 产品参数


Product Parameters

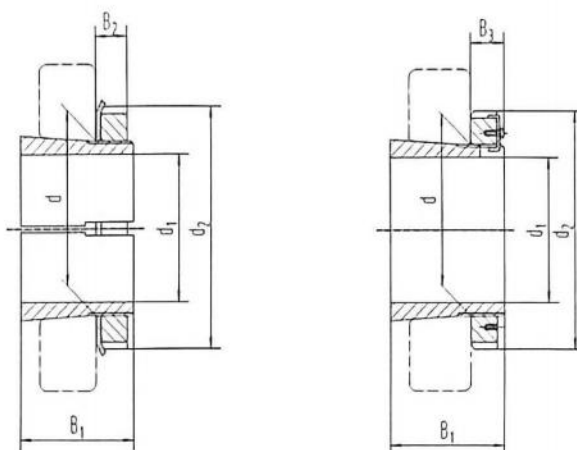

型号 Unit No.	主要尺寸 Dimentions						适用轴承型号 Appropriate bearing(s)				重量
	d	d ₁	B ₁	d ₂	B ₂	B ₃	调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
	mm										Kg
H 3034	170	150	101	200	29	—	—	—	23034K	—	5.8
H 3036	180	160	109	210	30	—	—	—	23036K	—	6.7
H 3038	190	170	112	220	31	—	—	—	23038K	—	7.25
H 3040	200	180	120	240	32	—	—	—	23040K	—	8.9
H 3044	220	200	126	260	—	41	—	—	23044K	—	9.9
H 3048	240	220	133	290	—	46	—	—	23048K	—	13.3
H 3052	260	240	145	310	—	46	—	—	23052K	—	15.4
H 3056	280	260	152	330	—	50	—	—	23056K	—	17.7
H 3060	300	280	168	360	—	54	—	—	23060K	—	22.7
H 3064	320	300	171	380	—	55	—	—	23064K	—	24.6
H 3068	340	320	187	400	—	58	—	—	23068K	—	28.9
H 3072	360	340	188	420	—	58	—	—	23072K	—	30.3
H 3076	380	360	193	450	—	62	—	—	23076K	—	35.9
H 3080	400	380	210	470	—	66	—	—	23080K	—	40
H 3084	420	400	212	490	—	66	—	—	23084K	—	47
H 3088	440	410	228	520	—	77	—	—	23088K	—	65
H 3092	460	430	234	540	—	77	—	—	23092K	—	71
H 3096	480	450	237	560	—	77	—	—	23096K	—	75
H 30/500	500	470	247	580	—	85	—	—	230/500K	—	82
H 30/530	530	500	265	630	—	90	—	—	230/530K	—	105
H 30/560	560	530	282	650	—	97	—	—	230/560K	—	112
H 30/600	600	560	289	700	—	97	—	—	230/600K	—	147
H 30/630	630	600	301	730	—	97	—	—	230/630K	—	138

◆ 产品参数


Product Parameters

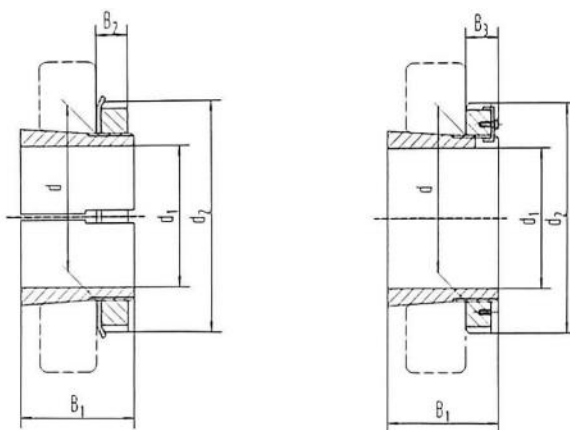

型号 Unit No.	主要尺寸 Dimentions						适用轴承型号 Appropriate bearing(s)				重量
	d	d ₁	B ₁	d ₂	B ₂	B ₃	调心球轴承 Selg-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
	mm										Kg
H 30/670	670	630	324	780	—	102	—	—	230/670K	—	190
H 30/710	710	670	342	830	—	112	—	—	230/710K	—	228
H 30/750	750	710	356	870	—	112	—	—	230/750K	—	246
H 30/800	800	750	366	920	—	112	—	—	230/800K	—	302
H 30/850	850	800	380	980	—	115	—	—	230/850K	—	341
H 30/900	900	850	400	1030	—	125	—	—	230/900K	—	387
H 30/950	950	900	420	1080	—	125	—	—	230/950K	—	424
H 30/1000	1000	950	430	1140	—	125	—	—	230/1000K	—	470
H 30/1060	1060	1000	447	1200	—	125	—	—	230/1060K	—	571
H 305	25	20	29	38	8	—	1305K	2205K	21305K	—	0.071
H 306	30	25	31	45	8	—	1306K	2206K	21306K	—	0.095
H 307	35	30	35	52	9	—	1307K	2207K	21307K	—	0.14
H 308	40	35	36	58	10	—	1308K	2208K	21308K	22208K	0.17
H 309	45	40	39	65	11	—	1309K	2209K	21309K	22209K	0.23
H 310	50	45	42	70	12	—	1310K	2210K	21310K	22210K	0.27
H 311	55	50	45	75	12	—	1311K	2211K	21311K	22211K	0.32
H 312	60	55	47	80	13	—	1312K	2212K	21312K	22212K	0.36
H 313	65	60	50	85	14	—	1313K	2213K	21313K	22213K	0.42
H 314	70	60	52	92	14	—	1314K	2214K	21314K	22214K	0.67
H 315	75	65	55	98	15	—	1315K	2215K	21315K	22215K	0.78
H 316	80	70	59	105	17	—	1316K	2216K	21316K	22216K	0.95
H 317	85	75	63	110	18	—	1317K	2217K	21317K	22217K	1.1
H 318	90	80	65	120	18	—	1318K	2218K	21318K	22218K	1.3

◆ 产品参数


Product Parameters

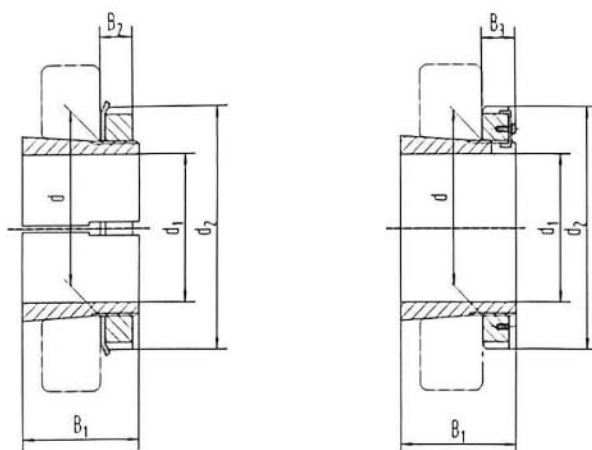

型号 Unit No.	主要尺寸 Dimentions						适用轴承型号 Appropriate bearing(s)				重量
	d	d ₁	B ₁	d ₂	B ₂	B ₃	调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
	mm										Kg
H 319	95	85	68	125	19	—	1319K	2219K	21319K	22219K	1.4
H 320	100	90	71	130	20	—	1320K	2220K	21320K	22220K	1.6
H 322	110	100	77	145	21	—	1322K	2222K	21322K	22222K	2.05
H 3120	100	90	76	130	20	—	—	—	23120K	—	1.8
H 3122	110	100	81	145	21	—	—	—	23122K	—	2.1
H 3124	120	110	88	155	22	—	—	—	23124K	22224K	2.5
H 3126	130	115	92	165	23	—	—	—	23126K	22226K	3.45
H 3128	140	125	97	180	24	—	—	—	23128K	22228K	4.1
H 3130	150	135	111	195	26	—	—	—	23130K	22230K	5.5
H 3132	160	140	119	210	28	—	—	—	23132K	22232K	7.25
H 3134	170	150	122	220	29	—	—	—	23134K	22234K	8.1
H 3136	180	160	131	230	30	—	—	—	23136K	22236K	9.15
H 3138	190	170	141	240	31	—	—	—	23138K	22238K	10.5
H 3140	200	180	150	250	32	—	—	—	23140K	22240K	12
H 3144	220	200	161	280	—	35	—	—	23144K	22244K	15
H 3148	240	220	172	300	—	37	—	—	23148K	22248K	16
H 3152	260	240	190	330	—	39	—	—	23152K	22252K	22.4
H 3156	280	260	195	350	—	41	—	—	23156K	22256K	24.5
H 3160	300	280	208	380	—	53	—	—	23160K	22260K	30.1
H 3164	320	300	226	400	—	56	—	—	23164K	22264K	35
H 3168	340	320	254	440	—	72	—	—	23168K	—	50.2
H 3172	360	340	259	460	—	75	—	—	23172K	—	55.4
H 3176	380	360	264	490	—	77	—	—	23176K	—	62.4

◆ 产品参数

Product Parameters

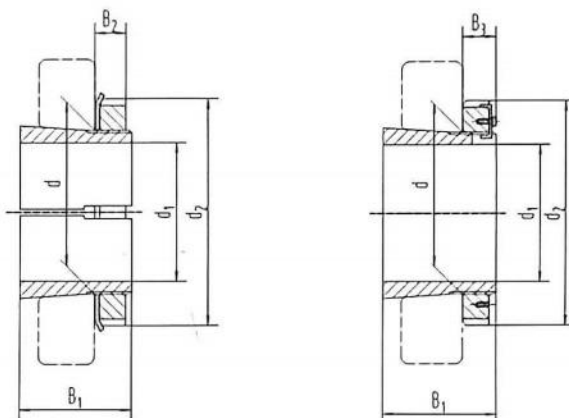


型号 Unit No.	主要尺寸 Dimentions						适用轴承型号 Appropriate bearing(s)				重量
	d	d ₁	B ₁	d ₂	B ₂	B ₃	调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
	mm										Kg
H 3180	400	380	272	520	—	82	—	—	23180K	—	73
H 3184	420	400	304	540	—	90	—	—	23184K	—	80
H 3188	440	410	307	560	—	90	—	—	23188K	—	95
H 3192	460	430	326	580	—	95	—	—	23192K	—	119
H 3196	480	450	335	620	—	95	—	—	23196K	—	135
H 31/500	500	470	356	630	—	100	—	—	231/500K	—	145
H 31/530	530	500	364	670	—	105	—	—	231/530K	—	161
H 31/560	560	530	377	710	—	110	—	—	231/560K	—	185
H 31/600	600	560	399	750	—	110	—	—	231/600K	—	234
H 31/630	630	600	424	800	—	120	—	—	231/630K	—	254
H 31/670	670	630	456	850	—	131	—	—	231/670K	—	340
H 31/710	710	670	467	900	—	135	—	—	231/710K	—	392
H 31/750	750	710	493	950	—	141	—	—	231/750K	—	451
H 31/800	800	750	505	1000	—	141	—	—	231/800K	—	535
H 31/850	850	800	536	1060	—	147	—	—	231/850K	—	616
H 31/900	900	850	557	1120	—	154	—	—	231/900K	—	677
H 31/950	950	900	583	1170	—	154	—	—	231/950K	—	738
H 31/1000	1000	950	609	1240	—	154	—	—	231/1000K	—	842
H 31/1060	1060	1000	622	1300	—	154	—	—	231/1060K	—	984
H 2305	25	20	35	38	8	—	2305K	—	—	—	0.085
H 2306	30	25	38	45	8	—	2306K	—	—	—	0.11
H 2307	35	30	43	52	9	—	2307K	—	—	—	0.16



◆ 产品参数


Product Parameters

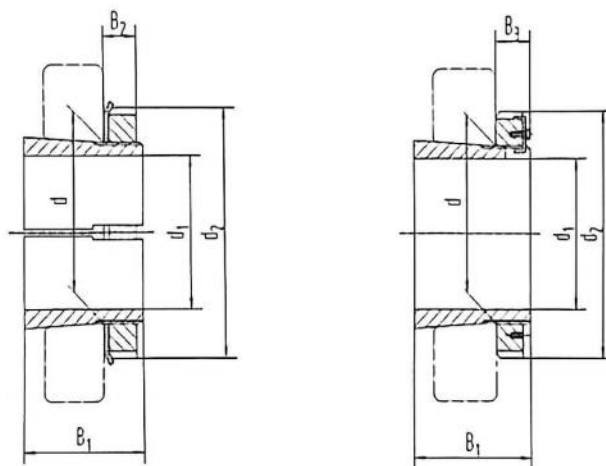


型号 Unit No.	主要尺寸 Dimentions						适用轴承型号 Appropriate bearing(s)				重量
	d	d ₁	B ₁	d ₂	B ₂	B ₃	调心球轴承 Selg-aligning ball bearing	调心滚子轴承 Spherical roller bearing		W.t	
	mm										Kg
H 2308	40	35	46	58	10	—	2308K	—	22308K	—	0.22
H 2309	45	40	50	65	11	—	2309K	—	22309K	—	0.27
H 2310	50	45	55	70	12	—	2310K	—	22310K	—	0.34
H 2311	55	50	59	75	12	—	2311K	—	22311K	—	0.39
H 2312	60	55	62	80	13	—	2312K	—	22312K	—	0.45
H 2313	65	60	65	85	14	—	2313K	—	22313K	—	0.52
H 2314	70	60	68	92	14	—	2314K	—	22314K	—	0.88
H 2315	75	65	73	98	15	—	2315K	—	22315K	—	1.1
H 2316	80	70	78	105	17	—	2316K	—	22316K	—	1.2
H 2317	85	75	82	110	18	—	2317K	—	22317K	—	1.35
H 2318	90	80	86	120	18	—	2318K	—	22318K	—	1.6
H 2319	95	85	90	125	19	—	2319K	—	22319K	—	1.8
H 2320	100	90	97	130	20	—	2320K	—	22320K	23220K	2
H 2322	110	100	105	140	21	—	2322K	—	22322K	23222K	2.75
H 2324	120	110	112	155	22	—	—	—	22324K	23224K	3
H 2326	130	115	121	165	23	—	—	—	22326K	23226K	4.45
H 2328	140	125	131	180	24	—	—	—	22328K	23228K	5.4
H 2330	150	135	139	195	26	—	—	—	22330K	23230K	6.4
H 2332	160	140	147	210	28	—	—	—	22332K	23232K	8.8
H 2334	170	150	154	220	29	—	—	—	22334K	23234K	9.9
H 2336	180	160	161	230	30	—	—	—	22336K	23236K	11
H 2338	190	170	169	240	31	—	—	—	22338K	23238K	12
H 2340	200	180	176	250	32	—	—	—	22340K	23240K	13.5
H 2344	220	200	186	280	—	35	—	—	22344K	23244K	17

◆ 产品参数

Product Parameters

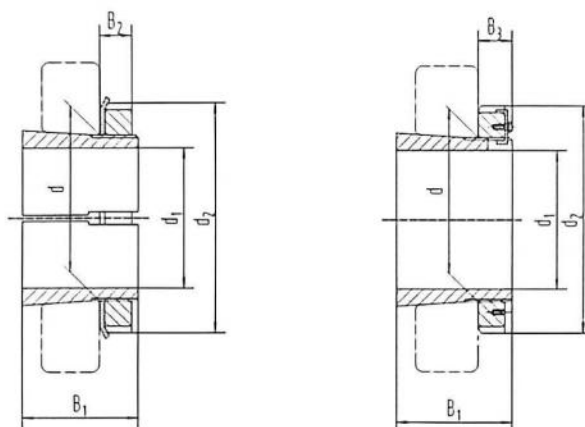

型号 Unit No.	主要尺寸 Dimentions						适用轴承型号 Appropriate bearing(s)				重量
	d	d ₁	B ₁	d ₂	B ₂	B ₃	调心球轴承		调心滚子轴承		W.t
							Selg-aligning ball bearing	Spherical roller bearing	22348K	23248K	
mm											Kg
H 2348	240	220	199	300	—	37	—	—	22348K	23248K	20
H 2352	260	240	211	330	—	39	—	—	22352K	23252K	24.5
H 2356	280	260	224	350	—	41	—	—	22356K	23256K	27.8
H 3260	300	280	240	380	—	53	—	—	—	23260K	34.4
H 3264	320	300	258	400	—	56	—	—	—	23264K	39.7
H 3268	340	320	288	440	—	72	—	—	—	23268K	55.7
H 3272	360	340	299	460	—	75	—	—	—	23272K	60.5
H 3276	380	360	310	490	—	77	—	—	—	23276K	69.5
H 3280	400	380	328	520	—	82	—	—	—	23280K	87
H 3284	420	400	352	540	—	90	—	—	—	23284K	96
H 3288	440	410	361	560	—	90	—	—	—	23288K	117
H 3292	460	430	382	580	—	95	—	—	—	23292K	134
H 3296	480	450	397	620	—	95	—	—	—	23296K	153
H 32/500	500	470	428	630	—	100	—	—	—	232/500K	170
H 32/530	530	500	447	670	—	105	—	—	—	232/530K	192
H 32/560	560	530	462	710	—	110	—	—	—	232/560K	219
H 32/600	600	560	487	750	—	110	—	—	—	232/600K	278
H 32/630	630	600	521	800	—	120	—	—	—	232/630K	300
H 32/670	670	630	558	850	—	131	—	—	—	232/670K	401
H 32/710	710	670	572	900	—	135	—	—	—	232/710K	459
H 32/750	750	710	603	950	—	141	—	—	—	232/750K	526
H 32/800	800	750	618	1000	—	141	—	—	—	232/800K	629
H 32/850	850	800	651	1060	—	147	—	—	—	232/850K	722

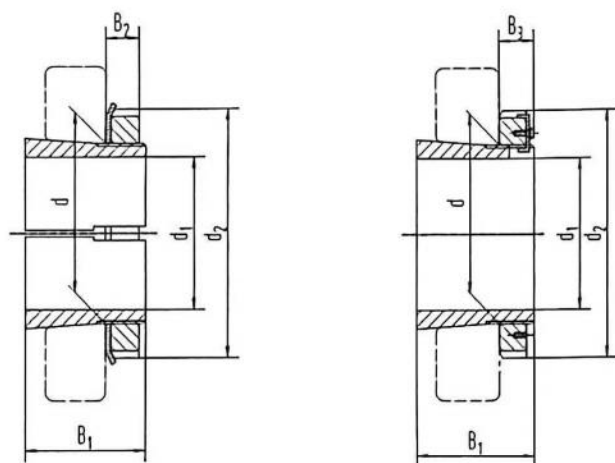



产品参数

Product Parameters

型号 Unit No.	主要尺寸 Dimentions						适用轴承型号 Appropriate bearing(s)				重量
	d	d ₁	B ₁	d ₂	B ₂	B ₃	调心球轴承 Selg-aligning ball bearing	调心滚子轴承 Spherical roller bearing		W.t Kg	
mm											
H 32/900	900	850	660	1120	—	154	—	—	—	232/900K 776	
H 32/950	950	900	675	1170	—	154	—	—	—	232/950K 834	
H 32/1000	1000	950	707	1240	—	154	—	—	—	232/1000K 952	
H 3924	120	110	60	145	22	—	—	—	23924K	— 1.7	
H 3926	130	115	65	155	23	—	—	—	23926K	— 2.4	
H 3928	140	125	66	165	24	—	—	—	23928K	— 2.7	
H 3930	150	135	76	180	26	—	—	—	23930K	— 3.6	
H 3932	160	140	78	190	28	—	—	—	23932K	— 4.6	
H 3934	170	150	79	200	29	—	—	—	23934K	— 5	
H 3936	180	160	87	210	30	—	—	—	23936K	— 5.7	
H 3938	190	170	89	220	31	—	—	—	23938K	— 6.2	
H 3940	200	180	98	240	32	—	—	—	23940K	— 7.9	
H 3944	220	200	96	260	—	41	—	—	23944K	— 7.95	
H 3948	240	220	101	290	—	46	—	—	23948K	— 11	
H 3952	260	240	116	310	—	46	—	—	23952K	— 11.7	
H 3956	280	260	121	330	—	50	—	—	23956K	— 15.3	
H 3960	300	280	140	360	—	54	—	—	23960K	— 20	
H 3964	320	300	140	380	—	55	—	—	23964K	— 21.5	
H 3968	340	320	144	400	—	58	—	—	23968K	— 24.5	
H 3972	360	340	144	420	—	58	—	—	23972K	— 25.2	
H 3976	380	360	164	450	—	62	—	—	23976K	— 31.5	
H 3980	400	380	168	470	—	66	—	—	23980K	— 35	
H 3984	420	400	168	490	—	66	—	—	23984K	— 36.9	

◆ 产品参数

Product Parameters

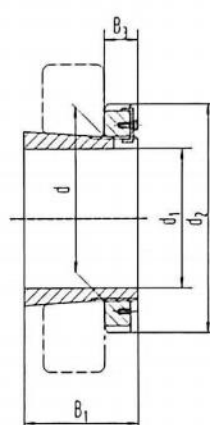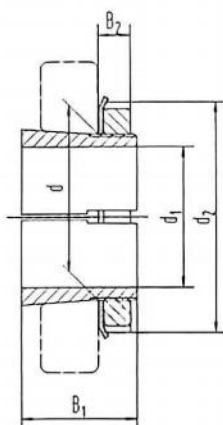

型号 Unit No.	主要尺寸 Dimensions						适用轴承型号 Appropriate bearing(s)				重量
	d	d ₁	B ₁	d ₂	B ₂	B ₃	调心球轴承 Self-aligning ball bearing	调心滚子轴承 Spherical roller bearing			W.t Kg
mm											
H 3988	440	410	189	520	—	77	—	—	23988K	—	58
H 3992	460	430	189	540	—	77	—	—	23992K	—	60
H 3996	480	450	200	560	—	77	—	—	23996K	—	66
H 39/500	500	470	208	580	—	85	—	—	239/500K	—	74.3
H 39/530	530	500	216	630	—	90	—	—	239/530K	—	87.9
H 39/560	560	530	227	650	—	97	—	—	239/560K	—	95
H 39/600	600	560	239	700	—	97	—	—	239/600K	—	127
H 39/630	630	600	254	730	—	97	—	—	239/630K	—	124
H 39/670	670	630	264	780	—	102	—	—	239/670K	—	162
H 39/710	710	670	286	830	—	112	—	—	239/710K	—	183
H 39/750	750	710	291	870	—	112	—	—	239/750K	—	211
H 39/800	800	750	303	920	—	112	—	—	239/800K	—	259
H 39/850	850	800	308	980	—	115	—	—	239/850K	—	288
H 39/900	900	850	326	1030	—	125	—	—	239/900K	—	330
H 39/950	950	900	344	1080	—	125	—	—	239/950K	—	362
H 3/1000	1000	950	358	1140	—	125	—	—	239/1000K	—	407
H 39/1060	1060	1000	372	1200	—	125	—	—	239/1060K	—	490




SHANDONG FODA BEARING TRANSMISSION CO.,LTD

退卸套

Withdrawal sleeve




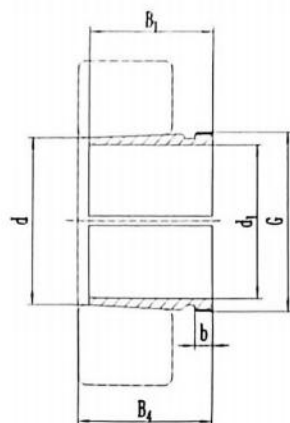

产品参数

Product Parameters

型号 Unit No.	螺纹 Thread	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量 W.t Kg
	G	d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		
mm											
AH 208	M45×1.5	40	35	25	27	KM09	1208K	—	—	—	0.094
AH 209	M50×1.5	45	40	26	29	KM10	1209K	—	—	—	0.104
AH 210	M55×2	50	45	28	31	KM11	1210K	—	—	—	0.13
AH 211	M60×2	55	50	29	32	KM12	1211K	—	—	—	0.167
AH 212	M65×2	60	55	32	35	KM13	1212K	—	—	—	0.175
AHX 213	M70×2	65	60	32.5	36	KM14	1213K	—	—	—	0.242
AHX 214	M75×2	70	65	33.5	37	KM15	1214K	—	—	—	0.255
AHX 215	M80×2	75	70	34.5	38	KM16	1215K	—	—	—	0.28
AH 216	M90×2	80	75	35.5	39	KM18	1216K	—	—	—	0.306
AH 217	M95×2	85	80	38.5	42	KM19	1217K	—	—	—	0.353
AH 218	M100×2	90	85	40	44	KM20	1218K	—	—	—	0.427
AH 219	M105×2	95	90	43	47	KM21	1219K	—	—	—	0.486
AH 220	M110×2	100	95	45	49	KM22	1220K	—	—	—	0.525
AH 222	M120×2	110	105	50	54	KM24	1222K	—	—	—	0.647
AH 224	M130×2	120	115	53	57	KM26	—	—	—	—	0.755
AH 226	M140×2	130	125	53	57	KM28	—	—	—	—	0.815
AH 228	M150×2	140	135	56	61	KM30	—	—	—	—	1
AH 230	M160×3	150	145	60	65	KM32	—	—	—	—	1.16
AH 232	M170×3	160	150	64	69	KM34	—	—	—	—	1.91
AH 234	M180×3	170	160	69	74	KM36	—	—	—	—	2.21
AH 236	M190×3	180	170	69	74	KM38	—	—	—	—	2.34
AHX 238	M200×3	190	180	73	78	KM40	—	—	—	—	2.94
AHX 240	Tr210×4	200	190	77	82	KM42	—	—	—	—	3.12
AHX 244	Tr230×4	220	200	85	91	KM46	—	—	—	—	6.1

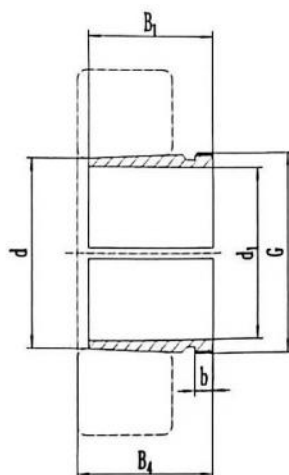


◆ 产品参数

Product Parameters

型号 Unit No.	螺纹 Thread G	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量 W.t Kg
		d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		
		mm									
AHX 248	Tr260×4	240	220	96	102	KM52	—	—	—	—	8.16
AHX 252	Tr280×4	260	240	105	111	KM56	—	—	—	—	9.89
AHX 256	Tr300×4	280	260	105	113	HM60	—	—	—	—	10.4
AH 3024	M130×2	120	115	60	64	KML26	—	—	23024K	—	0.73
AH 3026	M140×2	130	125	67	71	KML28	—	—	23026K	—	0.91
AH 3028	M150×2	140	135	68	73	KML30	—	—	23028K	—	1
AH 3030	M160×3	150	145	72	77	KML32	—	—	23030K	—	1.15
AH 3032	M170×3	160	150	77	82	KML34	—	—	23032K	—	2.05
AH 3034	M180×3	170	160	85	90	KML36	—	—	23034K	—	2.45
AH 3036	M190×3	180	170	92	98	KML38	—	—	23036K	—	2.8
AHX 3038	M200×3	190	180	96	102	KML40	—	—	23038K	—	3.3
AHX 3040	Tr210×4	200	190	102	108	KM42	—	—	23040K	—	3.7
AHX 3044	Tr230×4	220	200	111	117	KM46	—	—	23044K	—	7.3
AH 3048	Tr260×4	240	220	116	123	HML52	—	—	23048K	—	7.95
AH 3052	Tr280×4	260	240	128	135	HML56	—	—	23052K	—	10.6
AH 3056	Tr300×4	280	260	131	139	HML60	—	—	23056K	—	12
AH 3060	Tr320×5	300	280	145	153	HML64	—	—	23060K	—	14.2
AHX 3064	Tr340×5	320	300	149	157	HML68	—	—	23064K	—	16.5
AHX 3068	Tr360×5	340	320	162	171	HML72	—	—	23068K	—	18.6
AHX 3072	Tr380×5	360	340	167	176	HML76	—	—	23072K	—	20.4
AHX 3076	Tr400×5	380	360	170	180	HML80	—	—	23076K	—	22
AHX 3080	Tr420×5	400	380	183	193	HML84	—	—	23080K	—	26
AHX 3084	Tr440×5	420	400	186	196	HML88	—	—	23084K	—	27.3

◆ 产品参数

Product Parameters

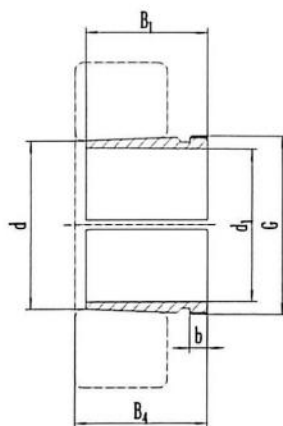


型号 Unit No.	螺纹 Thread	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量 W.t Kg
	G	d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		
	mm										
AHX 3088	Tr460×5	440	420	194	205	HML92	—	—	23088K	—	30.8
AHX 3092	Tr480×5	460	440	202	213	HML96	—	—	23092K	—	33.8
AHX 3096	Tr500×5	480	460	205	217	HML/500	—	—	23096K	—	36
AHX 30/500	Tr530×6	500	480	209	221	HML/530	—	—	230/500K	—	41
AH 30/530	Tr560×6	530	500	230	242	HML/560	—	—	230/530K	—	63.5
AH 30/560	Tr600×6	560	530	240	252	HML/600	—	—	230/560K	—	73.5
AH 30/600	Tr630×6	600	570	245	259	HML/630	—	—	230/600K	—	77
AH 30/630	Tr670×6	630	600	258	272	HML/670	—	—	230/630K	—	89.5
AH 30/670	Tr710×7	670	630	280	294	HML/710	—	—	230/670K	—	127
AH 30/710	Tr750×7	710	670	286	302	HML/750	—	—	230/710K	—	138
AH 30/750	Tr800×7	750	710	300	316	HML/800	—	—	230/750K	—	159
AH 30/800	Tr850×7	800	750	308	326	HML/850	—	—	230/800K	—	204
AH 30/850	Tr900×7	850	800	325	343	HML/900	—	—	230/850K	—	230
AH 30/900	Tr950×8	900	850	335	355	HML/950	—	—	230/900K	—	253
AH 30/950	Tr1000×8	950	900	355	375	HML/1000	—	—	230/950K	—	285
AH 30/1000	Tr1060×8	1000	950	365	387	HML/1060	—	—	230/1000K	—	318
AH 30/1060	Tr1120×8	1060	1000	385	407	HML/1120	—	—	230/1060K	—	406


AH 308	M45×1.5	40	35	29	32	KM09	1308K	2208K	21308K	22208K	0.09
AH 309	M50×1.5	45	40	31	34	KM10	1309K	2209K	21309K	22209K	0.12
AH 310	M55×2	50	45	35	38	KM11	1310K	2210K	21310K	22210K	0.13
AH 311	M60×2	55	50	37	40	KM12	1311K	2211K	21311K	22211K	0.16

◆ 产品参数

Product Parameters

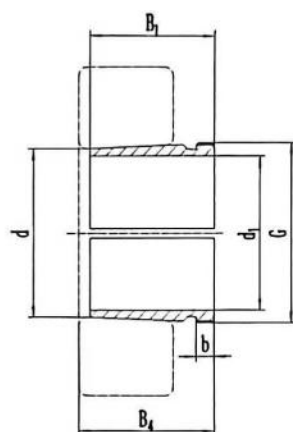

型号 Unit No.	螺纹 Thread G	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量 W.t Kg
		d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing	调心滚子轴承 Spherical roller bearing			
mm											
AH 312	M65×2	60	55	40	43	KM13	1312K	2212K	21312K	22212K	0.19
AHX 313	M70×2	65	60	42	45	KM14	1313K	2213K	21313K	22213K	0.23
AHX 314	M75×2	70	65	43	47	KM15	1314K	2214K	21314K	22214K	0.25
AHX 315	M80×2	75	70	45	49	KM16	1315K	2215K	21315K	22215K	0.3
AH 316	M90×2	80	75	48	52	KM18	1316K	2216K	21316K	22216K	0.37
AH 317	M95×2	85	80	52	56	KM19	1317K	2217K	21317K	22217K	0.43
AH 318	M100×2	90	85	53	57	KM20	1318K	2218K	21318K	22218K	0.46
AH 319	M105×2	95	90	57	61	KM21	1319K	2219K	21319K	22219K	0.54
AH 320	M110×2	100	95	59	63	KM22	1320K	2220K	21320K	22220K	0.58
AH 322	M120×2	110	105	63	67	KM24	1322K	—	21322K	—	0.77
AH 324	M130×2	120	115	69	73	KM26	—	—	—	—	0.875
AH 326	M140×2	130	125	74	78	KM28	—	—	—	—	1.03
AH 328	M150×2	140	135	77	82	KM30	—	—	—	—	1.15
AHX 330	M160×3	150	145	83	88	KM32	—	—	—	—	1.55
AHX 332	M170×3	160	150	88	93	KM34	—	—	—	—	2.73
AHX 334	M180×3	170	160	93	98	KM36	—	—	—	—	3.19
AH 3120	M110×2	100	95	64	68	KM22	—	—	23120K	—	0.66
AH 3122	M120×2	110	105	68	72	KM24	—	2222K	23122K	22222K	0.76
AH 3124	M130×2	120	115	75	79	KM26	—	—	23124K	22224K	0.94
AH 3126	M140×2	130	125	78	82	KM28	—	—	23126K	22226K	1.1
AH 3128	M150×2	140	135	83	88	KM30	—	—	23128K	22228K	1.3
AHX 3130	M160×3	150	145	96	101	KM32	—	—	23130K	22230K	1.7
AHX 3132	M170×3	160	150	103	108	KM34	—	—	23132K	22232K	3
AHX 3134	M180×3	170	160	104	109	KM36	—	—	23134K	22234K	3.2

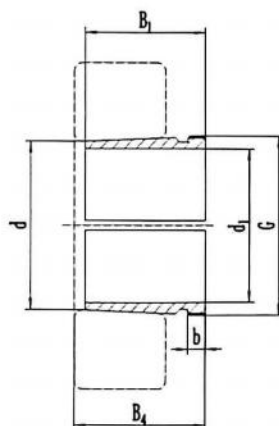


◆ 产品参数

Product Parameters

型号 Unit No.	螺纹 Thread G	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量 W.t Kg
		d	d ₁	B ₁	B ₄		调心球轴承 Selg-aligning ball bearing		调心滚子轴承 Spheirical roller bearing		
		mm									
AHX 3136	M190×3	180	170	116	122	KM38	—	—	23136K	—	3.9
AHX 3138	M200×3	190	180	125	131	KM40	—	—	23138K	—	4.5
AH 3140	Tr220×4	200	190	134	140	KM44	—	—	23140K	—	5.65
AH 3144	Tr240×4	220	200	145	151	KM48	—	—	23144K	—	9.3
AH 3148	Tr260×4	240	220	154	161	KM52	—	—	23148K	—	12
AHX 3152	Tr280×4	260	240	172	179	KM56	—	—	23152K	—	15
AHX 3156	Tr300×4	280	260	175	183	HM60	—	—	23156K	—	16.7
AHX 3160	Tr320×5	300	280	192	200	HM64	—	—	23160K	—	19.8
AHX 3164	Tr340×5	320	300	209	217	HM68	—	—	23164K	—	23.3
AHX 3168	Tr360×5	340	320	225	234	HM72	—	—	23168K	—	27.6
AHX 3172	Tr380×5	360	340	229	238	HM76	—	—	23172K	—	29.8
AHX 3176	Tr400×5	380	360	232	242	HM80	—	—	23176K	—	32
AHX 3180	Tr420×5	400	380	240	250	HM84	—	—	23180K	—	36
AHX 3184	Tr440×5	420	400	266	276	HM88	—	—	23184K	—	43
AHX 3188	Tr460×5	440	420	270	281	HM92	—	—	23188K	—	46
AHX 3192	Tr480×5	460	440	285	296	HM96	—	—	23192K	—	51.5
AHX 3196	Tr500×5	480	460	295	307	HM/500	—	—	23196K	—	56
AH 31/500	Tr530×6	500	480	313	325	HM/530	—	—	231/500K	—	66.5
AH 31/530	Tr560×6	530	500	325	337	HM/560	—	—	231/530K	—	94.5
AH 31/560	Tr600×6	560	530	335	347	HM/600	—	—	231/560K	—	108
AH 31/600	Tr630×6	600	570	355	369	HM/630	—	—	231/600K	—	120
AH 31/630	Tr670×6	630	600	375	389	HM/670	—	—	231/630K	—	140
AH 31/670	Tr710×7	670	630	395	409	HM/710	—	—	231/670K	—	189
AH 31/710	Tr750×7	710	670	405	421	HM/750	—	—	231/710K	—	207
AH 31/750	Tr800×7	750	710	425	441	HM/800	—	—	231/750K	—	238
AH 31/800	Tr850×7	800	750	438	456	HM/850	—	—	231/800K	—	305

◆ 产品参数


Product Parameters

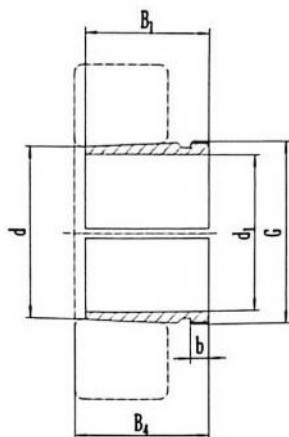

型号 Unit No.	螺纹 Thread	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量
	G	d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
mm											Kg
AH 31/850	Tr900×7	850	800	462	480	HM/900	—	—	231/850K	—	345
AH 31/900	Tr950×8	900	850	475	495	HM/950	—	—	231/900K	—	379
AH 31/950	Tr1000×8	950	900	500	520	HM/1000	—	—	231/950K	—	426
AH 31/1000	Tr1060×8	1000	950	525	547	HM/1060	—	—	231/1000K	—	485
AH 31/1060	Tr1120×8	1060	1000	540	562	HM/1120	—	—	231/1060K	—	599
AHX 2236	M190×3	180	170	105	110	KM38	—	—	—	22236K	3.4
AHX 2238	M200×3	190	180	112	117	KM40	—	—	—	22238K	3.9
AH 2240	Tr220×4	200	190	118	123	KM44	—	—	—	22240K	4.7
AH 2244	Tr240×4	220	200	130	136	KM48	—	—	—	22244K	9.4
AH 2248	Tr260×4	240	220	144	150	KM52	—	—	—	22248K	11.5
AHX 2252	Tr280×4	260	240	155	161	KM56	—	—	—	22252K	13.5
AHX 2256	Tr300×4	280	260	155	163	HM60	—	—	—	22256K	14.5
AHX 2260	Tr320×5	300	280	170	178	HM64	—	—	—	22260K	17.5
AHX 2264	Tr340×5	320	300	180	190	HM68	—	—	—	22264K	20
AH 2308	M45×1.5	40	35	40	43	KM09	2308K	—	22308K	—	0.13
AH 2309	M50×1.5	45	40	44	47	KM10	2309K	—	22309K	—	0.16
AH 2310	M55×2	50	45	50	53	KM11	2310K	—	22310K	—	0.19
AH 2311	M60×2	55	50	54	57	KM12	2311K	—	22311K	—	0.26
AH 2312	M65×2	60	55	58	61	KM13	2312K	—	22312K	—	0.3
AHX 2313	M70×2	65	60	61	64	KM14	2313K	—	22313K	—	0.36
AHX 2314	M75×2	70	65	64	68	KM15	2314K	—	22314K	—	0.42
AHX 2315	M80×2	75	70	68	72	KM16	2315K	—	22315K	—	0.48

◆ 产品参数


Product Parameters

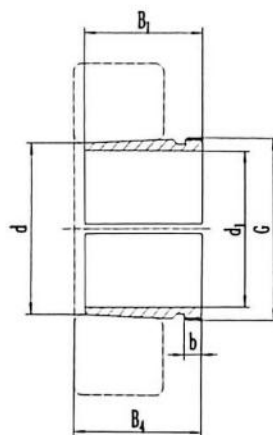

型号 Unit No.	螺纹 Thread	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量
	G	d	d ₁	B ₁	B ₄		调心球轴承 Selg-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
	mm										Kg
AH 2316	M90×2	80	75	71	75	KM18	2316K	—	22316K	—	0.57
AH 2317	M95×2	85	80	74	78	KM19	2317K	—	22317K	—	0.65
AH 2318	M100×2	90	85	79	83	KM20	2318K	—	22318K	—	0.76
AH 2319	M105×2	95	90	85	89	KM21	2319K	—	22319K	—	0.9
AH 2320	M110×2	100	95	90	94	KM22	2320K	—	22320K	—	1
AHX 2322	M120×2	110	105	98	102	KM24	2322K	—	22322K	—	1.28
AHX 2324	M130×2	120	115	105	109	KM26	—	—	22324K	—	1.53
AHX 2326	M140×2	130	125	115	119	KM28	—	—	22326K	—	1.9
AHX 2328	M150×2	140	135	125	130	KM30	—	—	22328K	—	2.25
AHX 2330	M160×3	150	145	135	140	KM32	—	—	22330K	—	3.7
AHX 2332	M170×3	160	150	140	146	KM34	—	—	22332K	—	4.3
AHX 2334	M180×3	170	160	146	152	KM36	—	—	22334K	—	4.85
AHX 2336	M190×3	180	170	154	160	KM38	—	—	22336K	—	5.5
AHX 2338	M200×3	190	180	160	167	KM40	—	—	22338K	—	6.1
AH 2340	Tr220×4	200	190	170	177	KM44	—	—	22340K	—	7.6
AH 2344	Tr240×4	220	200	181	189	KM48	—	—	22344K	23244K	13.5
AH 2348	Tr260×4	240	220	189	197	KM52	—	—	22348K	23248K	15.6
AHX 2352	Tr280×4	260	240	205	213	KM56	—	—	22352K	23252K	18.4
AHX 2356	Tr300×4	280	260	212	220	HM60	—	—	22356K	23256K	20.8
AH 3218	M100×2	90	85	63	67	KM20	—	—	23218K	—	0.576
AH 3219	M105×2	95	90	67	71	KM21	—	—	23219K	—	0.68
AH 3220	M110×2	100	95	73	77	KM22	—	—	23220K	—	0.76
AHX 3222	M120×2	110	105	82	86	KM24	—	—	23222K	—	1

产品参数


Product Parameters

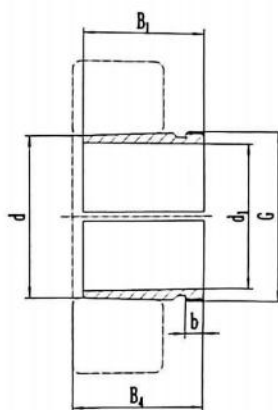

型号 Unit No.	螺纹 Thread	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量
	G	d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
mm											Kg
AHX 3224	M130×2	120	115	90	94	KM26	—	—	23224K	—	1.2
AHX 3226	M140×2	130	125	98	102	KM28	—	—	23226K	—	1.5
AHX 3228	M150×2	140	135	104	109	KM30	—	—	23228K	—	1.8
AHX 3230	M160×3	150	145	114	119	KM32	—	—	23230K	—	2.1
AHX 3232	M170×3	160	150	124	130	KM34	—	—	23232K	—	3.7
AHX 3234	M180×3	170	160	134	140	KM36	—	—	23234K	—	4.35
AHX 3236	M190×3	180	170	140	146	KM38	—	—	23236K	—	4.85
AHX 3238	M200×3	190	180	145	152	KM40	—	—	23238K	—	5.4
AH 3240	Tr220×4	200	190	153	160	KM44	—	—	23240K	—	6.6
AHX 3260	Tr320×5	300	280	228	236	HM64	—	—	23260K	—	24.5
AHX 3264	Tr340×5	320	300	246	254	HM68	—	—	23264K	—	28.5
AHX 3268	Tr360×5	340	320	264	273	HM72	—	—	23268K	—	33.3
AHX 3272	Tr380×5	360	340	274	283	HM76	—	—	23272K	—	35.5
AHX 3276	Tr400×5	380	360	284	294	HM80	—	—	23276K	—	41.1
AHX 3280	Tr420×5	400	380	302	312	HM84	—	—	23280K	—	48
AHX 3284	Tr440×5	420	400	321	331	HM88	—	—	23284K	—	54.5
AHX 3288	Tr460×5	440	420	330	341	HM92	—	—	23288K	—	59
AHX 3292	Tr480×5	460	440	349	360	HM96	—	—	23292K	—	66.5
AHX 3296	Tr500×5	480	460	364	376	HM/500	—	—	23296K	—	73.5
AHX 32/500	Tr530×6	500	480	393	405	HM/530	—	—	232/500K	—	89.5
AH 32/530	Tr560×6	530	500	412	424	HM/560	—	—	232/530K	—	127
AH 32/560	Tr600×6	560	530	422	434	HM/600	—	—	232/560K	—	143
AH 32/600	Tr630×6	600	570	445	459	HM/630	—	—	232/600K	—	159
AH 32/630	Tr670×6	630	600	475	489	HM/670	—	—	232/630K	—	188

◆ 产品参数


Product Parameters

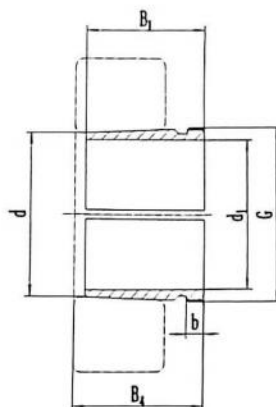

型号 Unit No.	螺纹 Thread G	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量 W.t Kg
		d	d _i	B _i	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		
mm											
AH 32/670	Tr710×7	670	630	500	514	HM/710	—	—	232/670K	—	252
AH 32/710	Tr750×7	710	670	515	531	HM/750	—	—	232/710K	—	278
AH 32/750	Tr800×7	750	710	540	556	HM/800	—	—	232/750K	—	320
AH 32/800	Tr850×7	800	750	554	568	HM/850	—	—	232/800K	—	401
AH 32/850	Tr900×7	850	800	585	603	HM/900	—	—	232/850K	—	461
AH 32/900	Tr950×8	900	850	585	605	HM/950	—	—	232/900K	—	489
AH 32/950	Tr1000×8	950	900	600	620	HM/1000	—	—	232/950K	—	533
AH 32/1000	Tr1060×8	1000	950	630	652	HM/1060	—	—	232/1000K	—	608
AH 3934	M180×3	170	160	59	64	KML36	—	—	23934K	—	1.59
AH 3936	M190×3	180	170	66	71	KML38	—	—	23936K	—	1.91
AH 3938	M200×3	190	180	66	71	KML40	—	—	23938K	—	2.02
AH 3940	Tr210×4	200	190	77	83	KM42	—	—	23940K	—	2.62
AH 3944	Tr230×4	220	200	77	83	KM46	—	—	23944K	—	4.83
AH 3948	Tr250×4	240	220	77	83	KM50	—	—	23948K	—	5.29
AH 3952	Tr280×4	260	240	94	100	HML56	—	—	23952K	—	7.36
AH 3956	Tr300×4	280	260	94	100	HML60	—	—	23956K	—	8.02
AH 3960	Tr320×5	300	280	112	119	HML64	—	—	23960K	—	10.5
AH 3964	Tr340×5	320	300	112	119	HML68	—	—	23964K	—	11.2
AH 3968	Tr360×5	340	320	112	119	HML72	—	—	23968K	—	11.9
AH 3972	Tr380×5	360	340	112	119	HML76	—	—	23972K	—	12.6
AH 3976	Tr400×5	380	360	130	138	HML80	—	—	23976K	—	15.4
AH 3980	Tr420×5	400	380	130	138	HML84	—	—	23980K	—	16.6
AH 3984	Tr440×5	420	400	130	138	HML88	—	—	23984K	—	17.5
AH 3988	Tr460×5	440	420	145	153	HML92	—	—	23988K	—	21.5

◆ 产品参数


Product Parameters

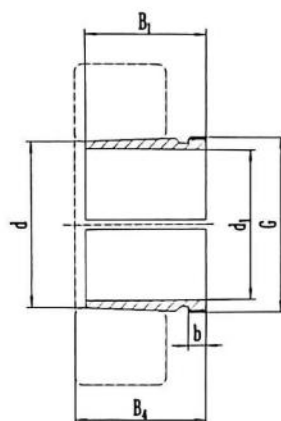

型号 Unit No.	螺纹 Thread G	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量 W.t Kg
		d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		
mm											
AH 3992	Tr480×5	460	440	145	153	HML96	—	—	23992K	—	22.5
AH 3996	Tr500×5	480	460	158	167	HML/500	—	—	23996K	—	26
AH 39/500	Tr530×6	500	480	162	172	HML/530	—	—	239/500K	—	28
AH 39/530	Tr560×6	530	500	175	185	HML/560	—	—	239/530K	—	43.4
AH 39/560	Tr600×6	560	530	180	190	HML/600	—	—	239/560K	—	47.4
AH 39/600	Tr630×6	600	570	192	202	HML/630	—	—	239/600K	—	56.1
AH 39/630	Tr670×6	630	600	210	222	HML/670	—	—	239/630K	—	62.8
AH 39/670	Tr710×7	670	630	216	228	HML/710	—	—	239/670K	—	85.5
AH 39/710	Tr750×7	710	670	228	240	HML/750	—	—	239/710K	—	102
AH 39/750	Tr800×7	750	710	234	246	HML/800	—	—	239/750K	—	111
AH 39/800	Tr850×7	800	750	245	257	HML/850	—	—	239/800K	—	147
AH 39/850	Tr900×7	850	800	258	270	HML/900	—	—	239/850K	—	166
AH 39/900	Tr950×8	900	850	265	277	HML/950	—	—	239/900K	—	182
AH 39/950	Tr1000×8	950	900	282	297	HML/1000	—	—	239/950K	—	216
AH 39/1000	Tr1060×8	1000	950	296	311	HML/1060	—	—	239/1000K	—	247
AH 39/1060	Tr1120×8	1060	1000	310	325	HML/1120	—	—	239/1060K	—	313
AH 24024	M125×2	120	115	73	82	KM25	—	—	24024K30	—	0.7
AH 24026	M135×2	130	125	83	93	KM27	—	—	24026K30	—	0.88
AH 24028	M145×2	140	135	83	93	KM29	—	—	24028K30	—	0.95
AH 24030	M155×3	150	145	90	101	KM31	—	—	24030K30	—	1.05
AH 24032	M170×3	160	150	95	106	KM34	—	—	24032K30	—	2.3
AH 24034	M180×3	170	160	106	117	KM36	—	—	24034K30	—	2.7

◆ 产品参数


Product Parameters

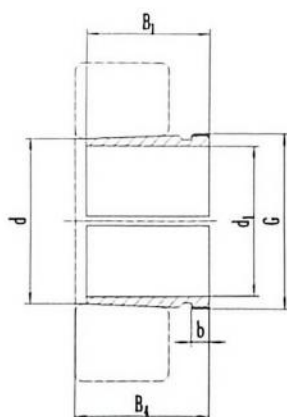

型号 Unit No.	螺纹 Thread	主要尺寸		Dimentions		拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量
	G	d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
	mm										Kg
AH 24036	M190×3	180	170	116	127	KM38	—	—	24036K30	—	3.2
AH 24038	M200×3	190	180	118	131	KM40	—	—	24038K30	—	3.55
AH 24040	Tr210×4	200	190	127	140	KM42	—	—	24040K30	—	4
AH 24044	Tr230×4	220	200	138	152	KM46	—	—	24044K30	—	8.22
AH 24048	Tr250×4	240	220	138	153	KM50	—	—	24048K30	—	9.03
AH 24052	Tr280×4	260	240	162	178	KM56	—	—	24052K30	—	12.5
AH 24056	Tr300×4	280	260	162	179	HM60	—	—	24056K30	—	13.2
AH 24060	Tr320×5	300	280	184	202	HM64	—	—	24060K30	—	17
AH 24064	Tr340×5	320	300	184	202	HM68	—	—	24064K30	—	17.4
AH 24068	Tr360×5	340	320	206	225	HM72	—	—	24068K30	—	21
AH 24072	Tr380×5	360	340	206	226	HM76	—	—	24072K30	—	22.4
AH 24076	Tr400×5	380	360	208	228	HM80	—	—	24076K30	—	23.8
AH 24080	Tr420×5	400	380	228	248	HM84	—	—	24080K30	—	27.9
AH 24084	Tr440×5	420	400	230	252	HM88	—	—	24084K30	—	29
AH 24088	Tr460×5	440	420	242	264	HM92	—	—	24088K30	—	32
AH 24092	Tr480×5	460	440	250	273	HM96	—	—	24092K30	—	34.7
AH 24096	Tr500×5	480	460	250	273	HM/500	—	—	24096K30	—	37.3
AH 240/500	Tr530×6	500	480	253	276	HM/530	—	—	240/500K30	—	41.7
AH 240/530	Tr560×6	530	500	285	309	HM/560	—	—	240/530K30	—	69.5
AH 240/560	Tr600×6	560	530	296	320	HM/600	—	—	240/560K30	—	79.5
AH 240/600	Tr630×6	600	570	310	336	HM/630	—	—	240/600K30	—	86.5
AH 240/630	Tr670×6	630	600	330	356	HM/670	—	—	240/630K30	—	101
AH 240/670	Tr710×7	670	630	348	374	HM/710	—	—	240/670K30	—	140

◆ 产品参数


Product Parameters

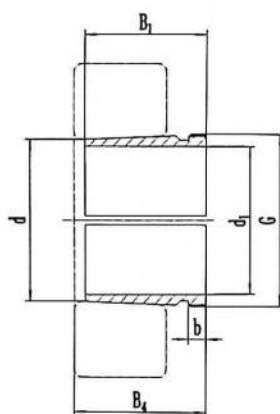

型号 Unit No.	螺纹 Thread	主要尺寸 Dimentions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量
	G	d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		W.t
	mm										Kg
AH 240/710	Tr750×7	710	670	360	386	HM/750	—	—	240/710K30	—	155
AH 240/750	Tr800×7	750	710	380	408	HM/800	—	—	240/750K30	—	178
AH 240/800	Tr850×7	800	750	395	423	HM/850	—	—	240/800K30	—	237
AH 240/850	Tr900×7	850	800	415	445	HM/900	—	—	240/850K30	—	265
AH 240/900	Tr950×8	900	850	430	475	HM/950	—	—	240/900K30	—	296
AH 240/950	Tr1000×8	950	900	467	512	HM/1000	—	—	240/950K30	—	340
AH 240/1000	Tr1060×8	1000	950	469	519	HM/1060	—	—	240/1000K30	—	369
AH 240/1060	Tr1120×8	1060	1000	498	548	HM/1120	—	—	240/1060K30	—	479
AH 24122	M115×2	110	105	82	91	KM23	—	—	24122K30	—	0.71
AH 24124	M130×2	120	115	93	102	KM26	—	—	24124K30	—	1
AH 24126	M140×2	130	125	94	104	KM28	—	—	24126K30	—	1.15
AH 24128	M150×2	140	135	99	109	KM30	—	—	24128K30	—	1.3
AH 24130	M160×3	150	145	115	126	KM32	—	—	24130K30	—	1.55
AH 24132	M170×3	160	150	124	135	KM34	—	—	24132K30	—	3
AH 24134	M180×3	170	160	125	136	KM36	—	—	24134K30	—	3.25
AH 24136	M190×3	180	170	134	145	KM38	—	—	24136K30	—	3.75
AH 24138	M200×3	190	180	146	159	KM40	—	—	24138K30	—	4.45
AH 24140	Tr210×4	200	190	158	171	KM42	—	—	24140K30	—	5.05
AH 24144	Tr230×4	220	200	170	184	KM46	—	—	24144K30	—	10
AH 24148	Tr260×4	240	220	180	195	KM52	—	—	24148K30	—	12.5
AH 24152	Tr280×4	260	240	202	218	KM56	—	—	24152K30	—	15.6
AH 24156	Tr300×4	280	260	202	219	HM60	—	—	24156K30	—	16.6
AH 24160	Tr320×5	300	280	224	242	HM64	—	—	24160K30	—	20.1

◆ 产品参数

Product Parameters

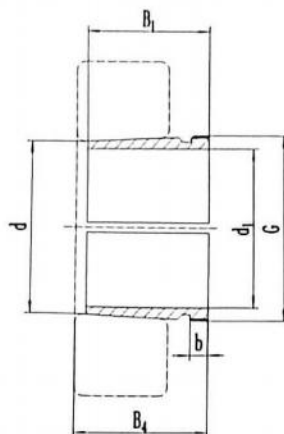

型号 Unit No.	螺纹 Thread G	主要尺寸 Dimensions				拆卸螺母 Lock nut	适用轴承型号 Appropriate bearing(s)				重量 W.t Kg
		d	d ₁	B ₁	B ₄		调心球轴承 Self-aligning ball bearing		调心滚子轴承 Spherical roller bearing		
		mm									
AH 24164	Tr340×5	320	300	242	260	HM68	—	—	24164K30	—	23.4
AH 24168	Tr360×5	340	320	269	288	HM72	—	—	24168K30	—	28.1
AH 24172	Tr380×5	360	340	269	289	HM76	—	—	24172K30	—	29.9
AH 24176	Tr400×5	380	360	271	291	HM80	—	—	24176K30	—	31.8
AH 24180	Tr420×5	400	380	278	298	HM84	—	—	24180K30	—	35
AH 24184	Tr440×5	420	400	310	332	HM88	—	—	24184K30	—	39
AH 24188	Tr460×5	440	420	310	332	HM92	—	—	24188K30	—	43.2
AH 24192	Tr480×5	460	440	332	355	HM96	—	—	24192K30	—	49.1
AH 24196	Tr500×5	480	460	340	363	HM/500	—	—	24196K30	—	51.5
AH 241/500	Tr530×6	500	480	360	383	HM/530	—	—	241/500K30	—	63
AH 241/530	Tr560×6	530	500	370	394	HM/560	—	—	241/530K30	—	91.5
AH 241/560	Tr600×6	560	530	393	417	HM/600	—	—	241/560K30	—	104.8
AH 241/600	Tr630×6	600	570	413	439	HM/630	—	—	241/600K30	—	120
AH 241/630	Tr670×6	630	600	440	466	HM/670	—	—	241/630K30	—	139
AH 241/670	Tr710×7	670	630	452	478	HM/710	—	—	241/670K30	—	185
AH 241/710	Tr750×7	710	670	483	509	HM/750	—	—	241/710K30	—	212
AH 241/750	Tr800×7	750	710	520	548	HM/800	—	—	241/750K30	—	248
AH 241/800	Tr850×7	800	750	525	553	HM/850	—	—	241/800K30	—	318
AH 241/850	Tr900×7	850	800	560	600	HM/900	—	—	241/850K30	—	368
AH 241/900	Tr950×8	900	850	575	620	HM/950	—	—	241/900K30	—	402
AH 241/950	Tr1000×8	950	900	605	650	HM/1000	—	—	241/950K30	—	449
AH 241/1000	Tr1060×8	1000	950	645	695	HM/1060	—	—	241/1000K30	—	519
AH 241/1060	Tr1120×8	1060	1000	665	715	HM/1120	—	—	241/1060K30	—	652



SHANDONG FODA BEARING TRANSMISSION CO.,LTD



胀紧联结套


Heave tight coupling sleeve



Z 1胀紧联结套

◆ 产品参数

Product Parameters




基本尺寸 Dimentions				p=100N/mm ² 时的额定负荷		重量
d	D	l	L	轴向力F _t	转矩M _t	W.t
mm				kN	kN · m	kg
200	224	34.8	38	262	26.2	2.32
210	234	34.8	38	275	28.9	2.45
220	244	34.8	38	288	37.7	2.49
240	267	39.5	42	358	43	3.52
250	280	44	48	415	52	4.68
260	290	44	48	435	56.5	4.82
280	313	49	53	520	72.5	6.27
300	333	49	53	555	83	6.47
320	360	59	65	710	114	10.9
340	380	59	65	755	128.5	11.5
360	400	59	65	800	144	12.2
380	420	59	65	845	160.5	12.8
400	440	59	65	890	178	13.5
420	460	59	65	935	196	14.1
450	490	59	65	998	224.5	15.2
480	520	59	65	1070	256	16
500	540	59	65	1110	278	16.5



Z 2型胀紧联结套

◆ 产品参数

Product Parameters

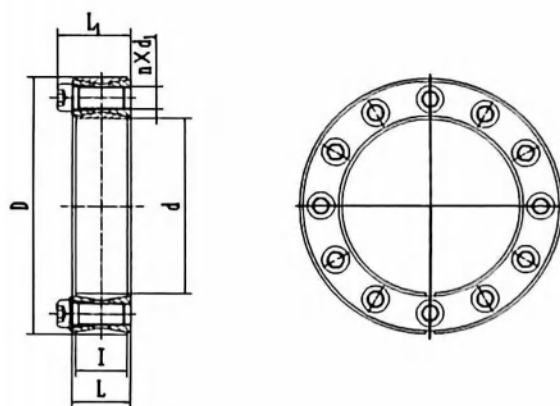


基本尺寸 Dimentions					内六角螺钉 Hexagon socket head cap screws		额定负荷 Rated burden		胀套与轴结 合面上的压力	胀套与轮圈 结合面上的压力	螺钉的拧紧力矩	重量
d	D	l	L	L ₁	d ₁	n	轴向力F _t	转矩M _t	p _f	p _f ¹	M _s	W.t
mm							kN	kN · m	N/mm ²	N/mm ²	N · m	kg
200	260	46	52	68	M14	30	525	52.5	150	115	190	8.65
210	275	50	56	74	M16	24	599	62.89	151	115	295	10.1
220	285	50	56	74	M16	26	620	68	150	115	295	11.22
240	305	50	56	74	M16	30	715	85.5	160	125	295	12.2
250	315	50	56	74	M16	32	768	96	162	125	295	12.7
260	325	50	56	74	M16	34	800	104	165	130	295	13.2
280	355	60	66	86.5	M18	32	915	128	145	115	405	19.2
300	375	60	66	86.5	M18	36	1020	153	150	120	405	20.5
320	405	72	78	100.5	M20	36	1310	210	150	120	580	29.6
340	425	72	78	100.5	M20	36	1310	224	145	115	580	31.1
360	455	84	90	116	M22	36	1630	294	145	115	780	42.2
380	475	84	90	116	M22	36	1620	308	135	110	780	44
400	495	84	90	116	M22	36	1610	322	130	105	780	46
420	515	84	90	116	M22	40	1780	374	135	110	780	50
450	555	96	102	130	M24	40	2050	461.25	124	100	1000	65
480	585	96	102	130	M24	42	2160	518.4	124	100	1000	71
500	605	96	102	130	M24	44	2240	560	123	100	1000	72.6
530	640	96	102	130	M24	45	2330	617	121	100	1000	83.6
560	670	96	102	130	M24	48	2440	680	120	100	1000	85
600	710	96	102	130	M24	50	2580	775	118	100	1000	91
630	740	96	102	130	M24	52	2680	844	117	105	1000	94
670	780	96	102	130	M24	56	2820	944	116	100	1000	101
710	820	96	102	130	M24	60	2970	1054	115	100	1000	106
750	860	96	102	130	M24	62	3130	1173	115	100	1000	112
800	910	96	102	130	M24	66	3260	1300	112	100	1000	118
850	960	96	102	130	M24	70	3500	1487	113	100	1000	125
900	1010	96	102	130	M24	75	3680	1650	112	100	1000	132
950	1060	96	102	130	M24	80	3870	1838	112	100	1000	139
1000	1110	96	102	130	M24	82	4000	2000	110	100	1000	146



Z 4胀紧联结套

◆ 产品参数

Product Parameters

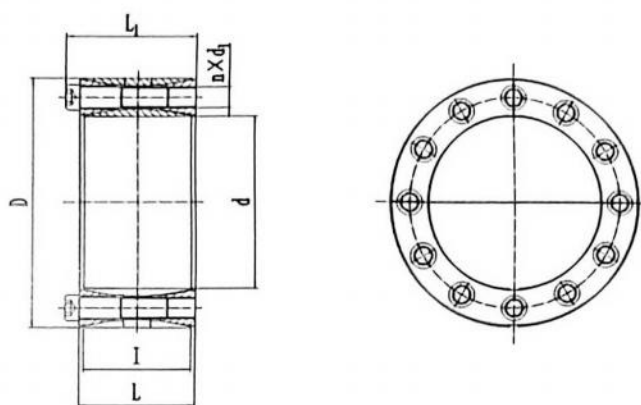


基本尺寸 Dimentions					内六角螺钉 Hexagon socket head cap screws		额定负荷 Rated burden		胀套与轴结 合面上的压力	胀套与轮毂 结合面上的压力	螺钉的拧紧力矩	重量
d	D	I	L	L ₁	d ₁	n	轴向力F _t	转矩M _t	p _I	p _I [']	M _s	W.t
mm							kN	kN · m	N/mm ²	N/mm ²	N · m	kg
200	270	88	94	110	M16	24	1050	105	242	179	355	18.8
210	290	110	116	134	M18	20	1118	117.3	197	143	485	23
220	300	110	116	134	M18	21	1120	123	189	138	485	27.7
240	320	110	116	134	M18	24	1280	153	198	148	485	29.8
250	330	110	116	134	M18	27	1282	160.2	205	157	485	31
260	340	110	116	134	M18	27	1430	186	205	157	485	32
280	370	130	136	156	M20	24	1650	230	192	145	690	46
300	390	130	136	156	M20	24	1650	245	179	138	690	49

Z 5胀紧型联结套

◆ 产品参数

Product Parameters

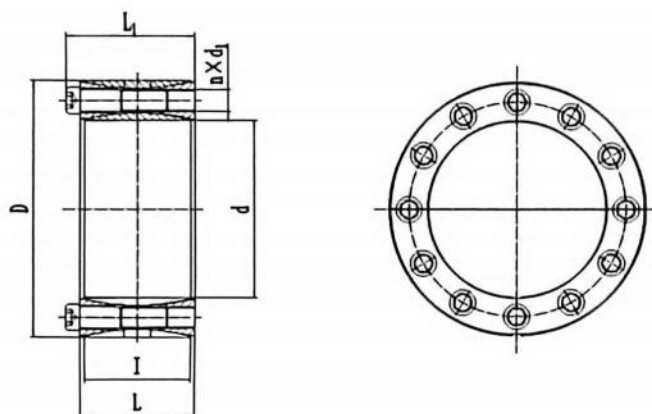


基本尺寸 Dimensions					内六角螺钉 Hexagon socket head cap screws		额定负荷 Rated burden		胀套与轴结 合面上的压力	胀套与轮毅 结合面上的压力	螺钉的拧紧力矩	重量
d	D	l	L	L ₁	d ₁	n	轴向力F _t	转矩M _t	p _f	p _f ¹	M _s	W.t
mm							kN	kN · m	N/mm ²	N/mm ²	N · m	kg
200	260	88	94	108	M14	24	950	95	203	156	230	15
210	275	98	104	120	M16	18	970	102	187	142	355	17.5
220	285	98	104	120	M16	18	990	109	183	141	355	19.8
240	305	98	104	120	M16	24	1318	158	222	176	355	21.4
250	315	98	104	120	M16	24	1340	167.5	215	170	355	22
260	325	98	104	120	M16	25	1370	178	215	172	355	23
280	355	120	126	144	M18	24	1590	222.5	188	149	485	35.2
300	375	120	126	144	M18	25	1650	248	183	146	485	37.4
320	405	135	142	162	M20	25	2140	344	192	152	690	51.3
340	425	135	142	162	M20	25	2140	365	181	144	690	54.1
360	455	158	165	187	M22	25	2670	480	176	139	930	75.4
380	475	158	165	187	M22	25	2670	508	166	133	930	79
400	495	158	165	187	M22	25	2670	535	158	128	930	82.8
420	515	158	165	187	M22	30	3200	673	181	147	930	86.5
450	555	172	180	204	M24	30	3700	832.5	175	142	1200	112
480	585	172	180	204	M24	32	3950	948	175	143	1200	119
500	605	172	180	204	M24	32	3950	988	168	139	1200	123
530	640	190	200	227	M27	30	4320	1145	157	130	1600	151
560	670	190	200	227	M27	30	4320	1210	148	124	1600	160
600	710	190	200	227	M27	32	4610	1380	147	124	1600	170



Z 8胀紧联结套

◆ 产品参数

Product Parameters

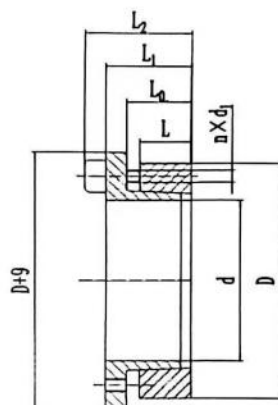


基本尺寸 Dimentions						内六角螺钉 Hexagon socket head cap screws		额定负荷 Rated burden		胀套与轴结 合面上的压力	胀套与轮轴 结合面上的压力	螺钉的拧紧力矩	重量
d	D	L	L ₀	L ₁	L ₂	d ₁	n	轴向力F _t	转矩M _t	p _f	p _f ¹	M _s	W.t
mm								kN	kN · m	N/mm ²	N/mm ²	N · m	kg
200	260	44	50	64	78	M14×40	15	528	52.8	160	125	230	9.9
220	285	50	56	72	88	M16×40	12	587	64.5	145	110	355	13.4
240	305	50	56	72	88	M16×40	15	734	88	165	130	355	14.3
260	325	50	56	72	88	M16×40	18	880	114	180	145	355	15.5
280	355	60	66	84	102	M18×50	16	948	132	150	120	485	22.9
300	375	60	66	84	102	M18×50	18	1059	159	160	125	485	24.4
320	405	74	81	101	121	M20×50	18	1374	220	150	120	690	36.1
340	425	74	81	101	121	M20×50	21	1603	272.5	175	135	690	38.4
360	455	86	94	116	138	M22×60	18	1710	308	140	110	930	46.2
380	475	86	94	116	138	M22×60	21	1995	379	155	125	930	55
400	495	86	94	116	138	M22×60	21	1995	399	150	120	930	61



Z 9胀紧型联结套

◆ 产品参数

Product Parameters

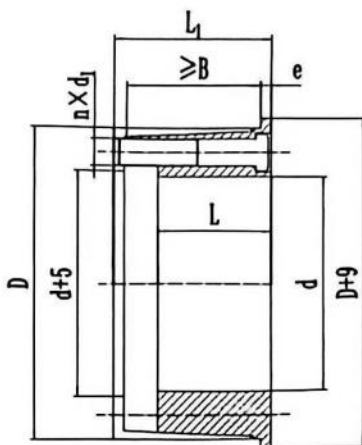


基本尺寸 Dimentions						内六角螺钉 Hexagon socket head cap screws		额定负荷 Rated burden		胀套与轴结 合面上的压力	胀套与轮毂 结合面上的压力	螺钉的拧紧力矩	重量
d	D	L	L ₁	e	B	d ₁	n	轴向力F _t	转矩M _t	p _f	p _f ¹	M _s	W.t
mm								kN	kN · m	N/mm ²	N/mm ²	N · m	kg
200	260	120	142	8	125	M20×120	16	526	52.8	100	77	230	15
220	285	120	142	8	140	M22×130	14	640	70	119	92	355	17.8
240	305	120	159	8	140	M22×130	16	731	88	96	75	355	23.2
260	325	120	159	8	140	M22×130	18	822	107	103	82	355	24.8
280	355	120	159	8	140	M22×130	20	910	128	96	75	355	33
300	375	120	159	8	140	M22×130	22	1000	151	99	79	355	36
320	405	120	159	8	140	M22×130	18	1280	206	101	80	690	52
340	425	120	159	8	140	M22×130	20	1420	242	106	85	690	54
360	455	120	159	8	140	M22×130	20	1770	319	113	89	930	72
380	475	120	159	8	140	M22×130	20	1770	337	109	87	930	75
400	485	120	159	8	140	M22×130	20	1770	355	101	83	930	78
420	515	120	159	8	140	M22×130	22	1980	410	107	87	930	82

Z12A胀紧型联结套

◆ 产品参数

Product Parameters

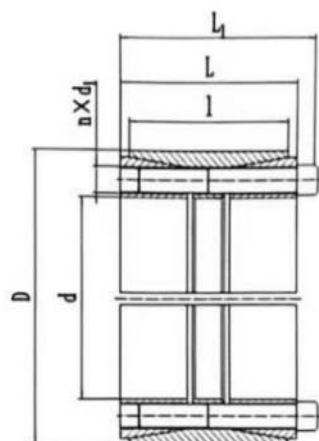


基本尺寸 Dimentions					内六角螺钉 Hexagon socket head cap screws		额定负荷 Rated burden		胀套与轴结合面 上的压力pl	胀套与轮毂结合 面上的压力pl	螺钉的拧紧力矩 MA	重量 W.t
d	D	l	L	L ₁	d ₁	n	轴向力F _t	转矩W _t	N/mm ²	N/mm ²	N · m	kg
mm							kN	kN · m				
200	260	134	146	162	M16	22	1437.5	143.7	172	112	355	24.9
220	285	134	146	162	M16	24	1581.8	174	172	115	355	29.6
240	305	134	146	162	M16	26	1725	207	172	119	355	31.9
260	325	134	146	162	M16	28	1846	240	170	117	355	34.3
280	355	165	177	197	M20	24	2428.5	340	168	117	690	52
300	375	165	177	197	M20	25	2540	381	161	123	690	55.3
320	405	165	177	197	M20	28	2881	461	175	119	690	67.3
340	425	165	177	197	M20	29	2994	509	171	119	690	71
360	455	190	202	224	M22	28	3588.8	646	169	115	930	96.5
380	475	190	202	224	M22	30	3821	726	170	115	930	101.2
400	495	190	202	224	M22	31	3960	792	168	120	930	106
420	515	190	202	224	M22	32	4100	861	165	116	930	110.7
440	535	190	202	224	M22	24	4260	937	165	112	930	110
460	555	190	202	224	M22	24	4260	980	158	107	930	113
480	575	190	202	224	M22	28	5000	1200	176	121	930	118
500	595	190	202	224	M22	28	5000	1240	169	117	930	122
520	615	190	202	224	M22	30	5330	1390	174	121	930	126
540	635	190	202	224	M22	30	5330	1440	168	117	930	131
560	655	190	202	224	M22	32	5680	1590	172	121	930	135
580	675	190	202	224	M22	33	5860	1705	172	121	930	140
600	695	190	202	224	M22	33	5860	1760	166	118	930	144



Z 1 2 B胀紧型联结套

◆ 产品参数

Product Parameters

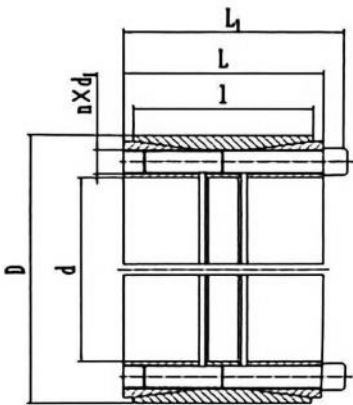


基本尺寸		Dimentions			内六角螺钉 Hexagon socket head cap screws		额定负荷 Rated burden		胀套与轴结合面	胀套与轮毂结合面	螺钉的拧紧力矩	重量
d	D	l	L	L ₁	d ₁	n	轴向力F _t Axial force	转矩W _t Torque	上的压力pf	上的压力pf ¹	M _A	W.t
		mm					kN	kN · m	N/mm ²	N/mm ²	N · m	kg
200	260	88	102	116	M14	20	1020	102	194	124	230	15.3
220	285	96	108	124	M16	15	1060	117	174	113	355	20.2
240	305	96	108	124	M16	20	1410	170	212	140	355	21.8
260	325	96	108	124	M16	21	1480	193	205	138	355	23.4
280	355	96	110	130	M20	15	1650	232	213	141	690	30
300	375	96	110	130	M20	15	1650	249	198	134	690	31.2
320	405	124	136	156	M20	20	2210	354	191	125	690	48
340	425	124	136	156	M20	20	2210	376	180	119	690	51
360	455	140	155	177	M22	20	2750	496	185	118	930	69
380	475	140	155	177	M22	20	2750	524	175	113	930	73
400	495	140	155	177	M22	22	3010	602	183	122	930	76
420	515	140	155	177	M22	24	3300	694	190	127	930	80
440	535	140	155	177	M22	24	3300	728	166	123	930	81
460	555	140	155	177	M22	24	3300	760	159	118	930	85
480	575	140	155	177	M22	25	3440	830	159	119	930	88
500	595	140	155	177	M22	25	3440	861	153	115	930	91
520	615	140	155	177	M22	28	3850	1003	164	124	930	95
540	635	140	155	177	M22	28	3850	1042	158	120	930	98
560	655	140	155	177	M22	30	4130	1157	163	125	930	101
580	675	140	155	177	M22	30	4130	1199	158	121	930	104
600	695	140	155	177	M22	30	4130	1240	153	118	930	108



Z 1 2 C胀紧型联结套

◆ 产品参数

Product Parameters

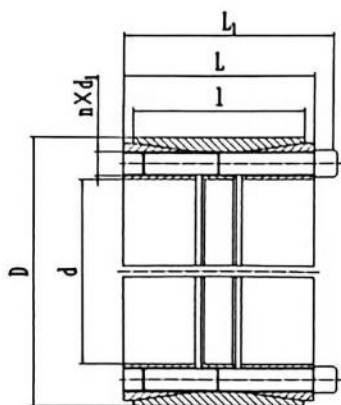

d	基本尺寸 Dimensions		L	L ₁	内六角螺钉 Hexagon socket head cap screws		额定负荷 Rated burden		胀套与轴结合面 上的压力p _f	胀套与轮毂结合 面上的压力p _f	螺钉的拧紧力矩 M _A	重量 W.t
	D	l			d ₁	n	轴向力F _t	转矩M _t	N/mm ²	N/mm ²	N · m	kg
		mm					kN	kN · m				
200	260	88	102	116	M14	18	484	48.45	92	59	108	15.3
220	285	96	108	124	M16	15	505	55.57	83	54	168	20.2
240	305	96	108	124	M16	20	673	80.75	100	67	168	21.8
260	325	96	108	124	M16	21	705	91.67	97	66	168	23.4
280	355	96	110	130	M20	15	877	122.8	114	75	369	30
300	375	96	110	130	M20	15	887	133	106	72	369	31.2
320	405	124	136	156	M20	20	1181	189	102	67	369	48
340	425	124	136	156	M20	20	1181	200.8	96	64	369	51
360	455	140	155	177	M22	20	1455	262	98	62	495	69
380	475	140	155	177	M22	20	1455	277.7	93	60	495	73
400	495	140	155	177	M22	22	1595	319	97	65	495	76
420	515	140	155	177	M22	24	1751	367.8	100	68	495	80
440	535	140	155	177	M22	24	1952	429.5	98	73	550	81
460	555	140	155	177	M22	24	1952	448.4	94	70	550	85
480	575	140	155	177	M22	25	2040	489.7	94	70	550	88
500	595	140	155	177	M22	25	2040	508	90	68	550	91
520	615	140	155	177	M22	28	2273	591	97	73	550	95
540	635	140	155	177	M22	28	2273	614	93	71	550	98
560	655	140	155	177	M22	30	2437	682.6	96	74	550	101
580	675	140	155	177	M22	30	2437	707.4	93	72	550	104
600	695	140	155	177	M22	30	2437	731.6	90	70	550	108



SHANDONG FODA BEARING TRANSMISSION CO.,LTD




锁紧螺母

Locking nut sleeve

◆ 产品参数


Product Parameters

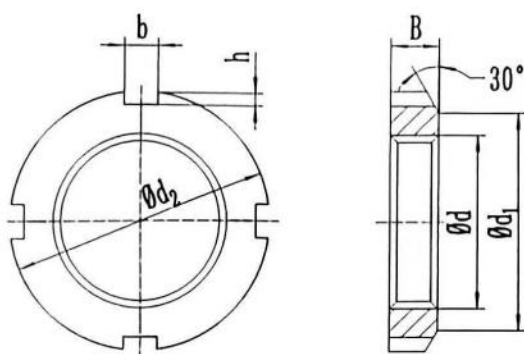

型号 Unit No	螺纹 Thread G	d	d ₁	主要尺寸 Dimentions d ₂	B	b	h	锁紧垫圈 Lock washer	锁紧卡 Lock card	重量 W.t Kg
mm										
KM05	M25×1.5	25	32	38	7	5	2	MB05	—	0.028
KM06	M30×1.5	30	38	45	7	5	2	MB06	—	0.038
KM07	M35×1.5	35	44	52	8	5	2	MB07	—	0.058
KM08	M40×1.5	40	50	58	9	6	2.5	MB08	—	0.078
KM09	M45×1.5	45	56	65	10	6	2.5	MB09	—	0.11
KM10	M50×1.5	50	61	70	11	6	2.5	MB10	—	0.14
KM11	M55×2	55	67	75	11	7	3	MB11	—	0.15
KM12	M60×2	60	73	80	11	7	3	MB12	—	0.16
KM13	M65×2	65	79	85	12	7	3	MB13	—	0.19
KM14	M70×2	70	85	92	12	8	3.5	MB14	—	0.22
KM15	M75×2	75	90	98	13	8	3.5	MB15	—	0.27
KM16	M80×2	80	95	105	15	8	3.5	MB16	—	0.36
KM17	M85×2	85	102	110	16	8	3.5	MB17	—	0.42
KM18	M90×2	90	108	120	16	10	4	MB18	—	0.51
KM19	M95×2	95	113	125	17	10	4	MB19	—	0.58
KM20	M100×2	100	120	130	18	10	4	MB20	—	0.68
KM21	M105×2	105	126	140	18	12	5	MB21	—	0.81
KM22	M110×2	110	133	145	19	12	5	MB22	—	0.89
KM23	M115×2	115	137	150	19	12	5	MB23	—	0.91
KM24	M120×2	120	138	155	20	12	5	MB24	—	0.98
KM25	M125×2	125	148	160	21	12	5	MB25	—	1.1
KM26	M130×2	130	149	165	21	12	5	MB26	—	1.2
KM27	M135×2	135	160	175	22	14	6	MB27	—	1.4
KM28	M140×2	140	160	180	22	14	6	MB28	—	1.4

◆ 产品参数


Product Parameters

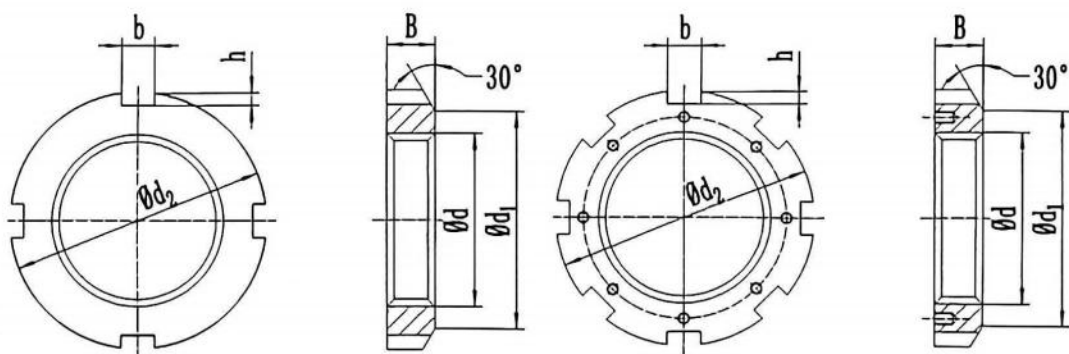

型号 Unit No	螺纹 Thread G	d	d ₁	d ₂	主要尺寸 Dimentions mm			锁紧垫圈 Lock washer	锁紧卡 Lock card	重量 W.l Kg
KM29	M145×2	145	171	190	24	14	6	MB29	—	1.85
KM30	M150×2	150	171	195	24	14	6	MB30	—	1.85
KM31	M155×3	155	182	200	25	16	7	MB31	—	2.05
KM32	M160×3	160	182	210	25	16	7	MB32	—	2.25
KM33	M165×3	165	193	210	26	16	7	MB33	—	2.3
KM34	M170×3	170	193	220	26	16	7	MB34	—	2.55
KM36	M180×3	180	203	230	27	18	8	MB36	—	2.7
KM38	M190×3	190	214	240	28	18	8	MB38	—	3
KM40	M200×3	200	226	250	29	18	8	MB40	—	3.3
HM44	Tr220×4	220	250	280	32	20	10	MB44	MS44	5.1
HM48	Tr240×4	240	270	300	34	20	10	MB48	MS44	5.65
HM52	Tr260×4	260	300	330	36	24	12	MB52	MS52	7.55
HM56	Tr280×4	280	320	350	38	24	12	MB56	MS52	8.65
HM60	Tr300×4	300	340	380	40	24	12	—	MS60	11.5
HM64	Tr320×5	320	360	400	42	24	12	—	MS64	13
HM68	Tr340×5	340	400	440	55	28	15	—	MS68	24
HM72	Tr360×5	360	420	460	58	28	15	—	MS68	26.5
HM76	Tr380×5	380	440	490	60	32	18	—	MS76	32
HM80	Tr400×5	400	460	520	62	32	18	—	MS80	38
HM84	Tr420×5	420	490	540	70	32	18	—	MS80	45
HM88	Tr440×5	440	510	560	70	36	20	—	MS88	46.5
HM92	Tr460×5	460	540	580	75	36	20	—	MS88	50.5
HM96	Tr480×5	480	560	620	75	36	20	—	MS96	62

◆ 产品参数


Product Parameters

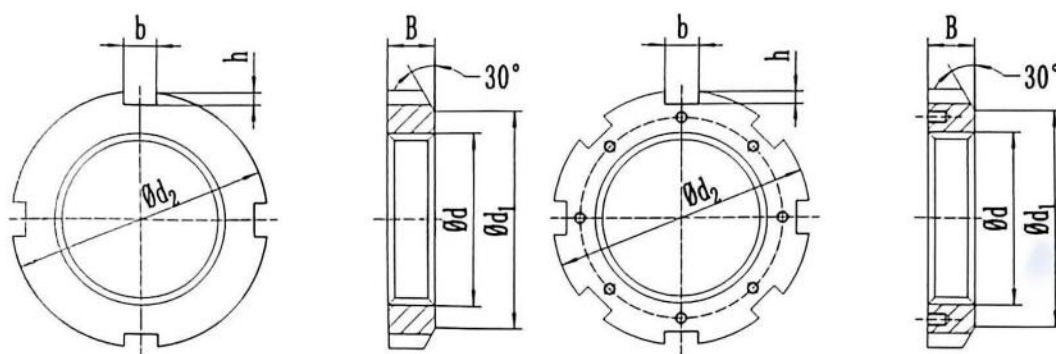

型号 Unit No	螺纹 Thread G	d	d ₁	d ₂	主要尺寸 Dimentions mm			锁紧垫圈 Lock washer	锁紧卡 Lock card	重量 W.t Kg
HM/500	Tr500×5	500	580	630	80	40	23	—	MS/500	63.5
HM/530	Tr530×6	530	610	670	80	40	23	—	MS/530	71.5
HM/560	Tr560×6	560	650	710	85	45	25	—	MS/560	86.5
HM/600	Tr600×6	600	690	750	85	45	25	—	MS/560	91.5
HM/630	Tr630×6	630	730	800	95	50	28	—	MS/630	125
HM/670	Tr670×6	670	775	850	106	50	28	—	MS/670	155
HM/710	Tr710×7	710	825	900	106	55	30	—	MS/710	162
HM/750	Tr750×7	750	875	950	112	60	34	—	MS/750	190
HM/800	Tr800×7	800	925	1000	112	60	34	—	MS/750	202
HM/850	Tr850×7	850	975	1060	118	70	38	—	MS/850	234
HM/900	Tr900×7	900	1030	1120	125	70	38	—	MS/900	279
HM/950	Tr950×8	950	1080	1170	125	70	38	—	MS/950	293
HM/1000	Tr1000×8	1000	1140	1240	125	70	38	—	MS/1000	336
HM/1060	Tr1060×8	1060	1210	1300	125	70	38	—	MS/1000	354
KML24	M120×2	120	135	145	20	12	5	MBL24	—	0.69
KML26	M130×2	130	145	155	21	12	5	MBL26	—	0.84
KML28	M140×2	140	155	165	22	14	5	MBL28	—	0.92
KML30	M150×2	150	170	180	24	14	5	MBL30	—	1.3
KML32	M160×3	160	180	190	25	16	5	MBL32	—	1.4
KML34	M170×3	170	190	200	26	16	5	MBL34	—	1.6
KML36	M180×3	180	200	210	27	18	5	MBL36	—	1.8
KML38	M190×3	190	210	220	28	18	5	MBL38	—	1.9
KML40	M200×3	200	222	240	29	18	8	MBL40	—	2.6

◆ 产品参数

Product Parameters

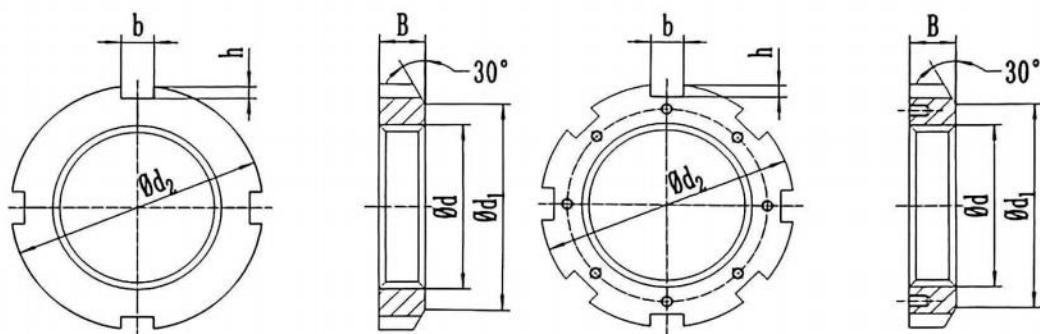


型号 Unit No	螺纹 Thread G	d	d ₁	d ₂	B	b	h	锁紧垫圈 Lock washer	锁紧卡 Lock card	重量 W.t Kg
主要尺寸 Dimentions mm										
HML44	Tr220×4	220	242	260	30	20	9	—	MSL44	3.1
HML48	Tr240×4	240	270	290	34	20	10	—	MSL48	4.5
HML52	Tr260×4	260	290	310	34	20	10	—	MSL48	4.8
HML56	Tr280×4	280	310	330	38	24	10	—	MSL56	5.75
HML60	Tr300×4	300	336	360	42	24	12	—	MSL60	8.35
HML64	Tr320×5	320	356	380	42	24	12	—	MSL64	9
HML68	Tr340×5	340	376	400	45	24	12	—	MSL64	11
HML72	Tr360×5	360	394	420	45	28	13	—	MSL72	11.5
HML76	Tr380×5	380	422	450	48	28	14	—	MSL76	15
HML80	Tr400×5	400	442	470	52	28	14	—	MSL76	17
HML84	Tr420×5	420	462	490	52	32	14	—	MSL84	18.5
HML88	Tr440×5	440	490	520	60	32	15	—	MSL88	26
HML92	Tr460×5	460	510	540	60	32	15	—	MSL88	27
HML96	Tr480×5	480	530	560	60	36	15	—	MSL96	28
HML/500	Tr500×5	500	550	580	68	36	15	—	MSL/96	33.5
HML/530	Tr530×6	530	590	630	68	40	20	—	MSL/530	42.5
HML/560	Tr560×6	560	610	650	75	40	20	—	MSL/560	44.5
HML/600	Tr600×6	600	660	700	75	40	20	—	MSL/560	52.5
HML/630	Tr630×6	630	690	730	75	45	20	—	MSL/630	55
HML/670	Tr670×6	670	740	780	80	45	20	—	MSL/670	68.5
HML/710	Tr710×7	710	780	830	90	50	25	—	MSL/710	91.5
HML/750	Tr750×7	750	820	870	90	55	25	—	MSL/750	94
HML/800	Tr800×7	800	870	920	90	55	25	—	MSL/750	99.5
HML/850	Tr850×7	850	920	980	90	60	25	—	MSL/850	115



◆ 产品参数

Product Parameters

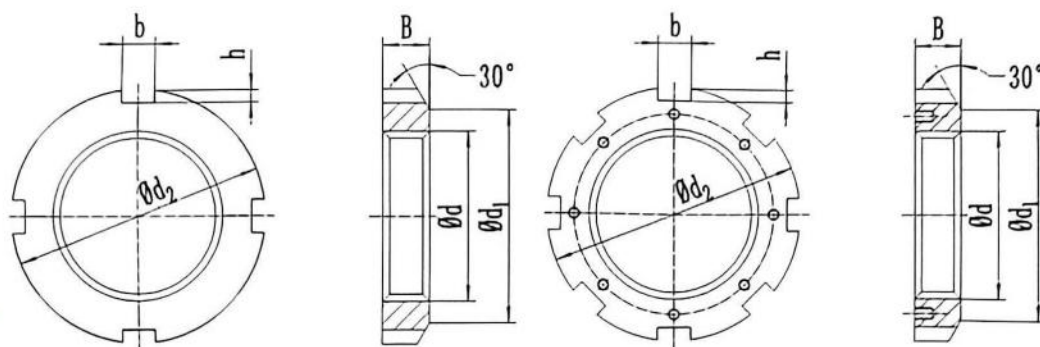

型号 Unit No	螺纹 Thread G	d	d ₁	d ₂	主要尺寸 Dimentions mm			锁紧垫圈 Lock washer	锁紧卡 Lock card	重量 W.t Kg
HML/900	Tr900×7	900	975	1030	100	60	25	—	MSL/850	131
HML/950	Tr950×8	950	1025	1080	100	60	25	—	MSL/950	139
HML/1000	Tr1000×8	1000	1085	1140	100	60	25	—	MSL/1000	157
HML/1060	Tr1060×8	1060	1145	1200	100	60	25	—	MSL/1000	166
HML/1120	Tr1120×8	1120	1205	1260	100	60	25	—	MSL/1000	175




SHANDONG FODA BEARING TRANSMISSION CO.,LTD

精密锁紧螺母
Locking nut sleeve



◆ 产品参数

Product Parameters

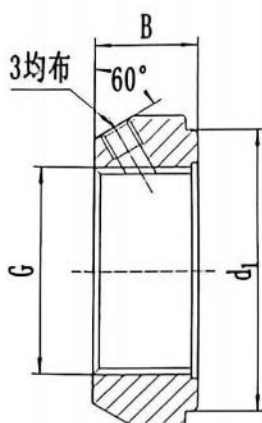


型号 Unit No	主要尺寸 Dimentions	轴向承载能力 axial load capacity	锁紧螺丝 lock screw	锁紧扭矩 Lock torque		
	d ₁	B	G			
KMT08	59	22	M40×1.5	210	M8	18
KMT09	64	22	M45×1.5	240	M8	18
KMT10	68	25	M50×1.5	300	M8	18
KMT11	78	25	M55×2	340	M8	18
KMT12	82	26	M60×2	380	M8	18
KMT13	87	28	M65×2	460	M8	18
KMT14	92	28	M70×2	490	M8	18
KMT15	97	28	M75×2	520	M8	18
KMT16	100	32	M80×2	620	M8	18
KMT17	110	32	M85×2	650	M10	35
KMT18	115	32	M90×2	680	M10	35
KMT19	120	32	M95×2	710	M10	35
KMT20	125	32	M100×2	740	M10	35
KMT22	134	32	M110×2	800	M10	35
KMT24	144	32	M120×2	860	M10	35
KMT26	154	32	M130×2	920	M10	35
KMT28	164	32	M140×2	980	M10	35
KMT30	174	32	M150×2	1040	M10	35
KMT32	184	32	M160×3	1100	M10	35
KMT34	192	32	M170×3	1160	M10	35
KMT36	204	32	M180×3	1220	M10	35
KMT38	214	32	M190×3	1280	M10	35
KMT40	224	32	M200×3	1340	M10	35



SHANDONG FODA BEARING TRANSMISSION CO.,LTD


锁紧垫圈、缩进卡

Lock washer、Lock card

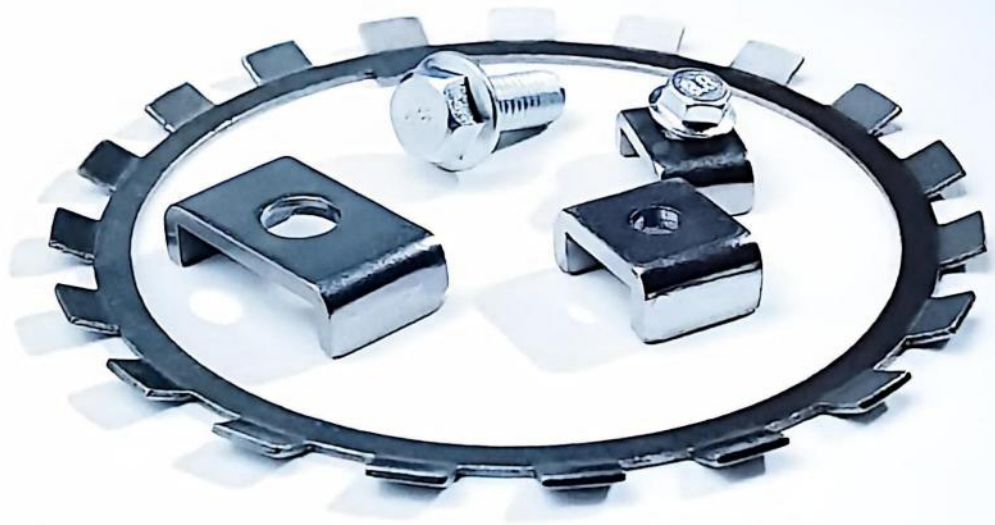

◆ 产品参数


Product Parameters

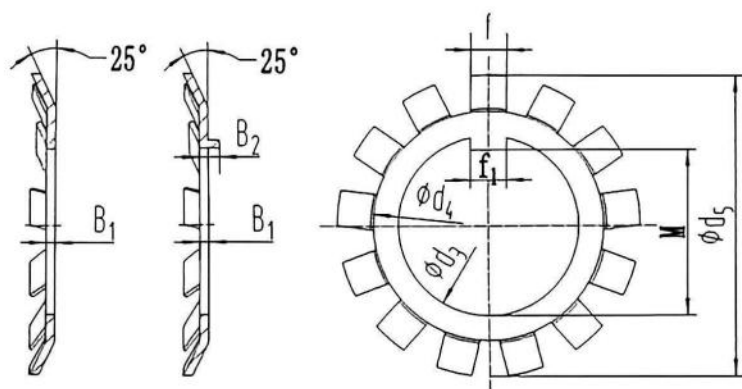

型号 Unit No		主要尺寸 Dimentions								外爪数 N min
MB型	MBA型	d_3	d_4	d_5	f_1	M	f	B_1	B_2	
mm										
MB05	MBA05	25	32	42	5	23	5	1.25	4	13
MB06	MBA06	30	38	49	5	27.5	5	1.25	4	13
MB07	MBA07	35	44	57	6	32.5	5	1.25	4	13
MB08	MBA08	40	50	62	6	37.5	6	1.25	5	13
MB09	MBA09	45	56	69	6	42.5	6	1.25	5	13
MB10	MBA10	50	61	74	6	47.5	6	1.25	5	13
MB11	MBA11	55	67	81	8	52.5	7	1.5	5	17
MB12	MBA12	60	73	86	8	57.5	7	1.5	6	17
MB13	MBA13	65	79	92	8	62.5	7	1.5	6	17
MB14	MBA14	70	85	98	8	66.5	8	1.5	6	17
MB15	MBA15	75	90	104	8	71.5	8	1.5	6	17
MB16	MBA16	80	95	112	10	76.5	8	1.8	6	17
MB17	MBA17	85	102	119	10	81.5	8	1.8	6	17
MB18	MBA18	90	108	126	10	86.5	10	1.8	8	17
MB19	MBA19	95	113	133	10	91.5	10	1.8	8	17
MB20	MBA20	100	120	142	12	96.5	10	1.8	8	17
MB21	MBA21	105	126	145	12	100.5	12	1.8	10	17
MB22	MBA22	110	133	154	12	105.5	12	1.8	10	17
MB23	MBA23	115	137	159	12	110.5	12	2	10	17
MB24	MBA24	120	138	164	14	115	12	2	10	17
MB25	MBA25	125	148	170	14	120	12	2	10	17
MB26	MBA26	130	149	175	14	125	12	2	10	17
MB27	MBA27	135	160	185	14	130	14	2	10	17
MB28	MBA28	140	160	192	16	135	14	2	10	17

◆ 产品参数


Product Parameters

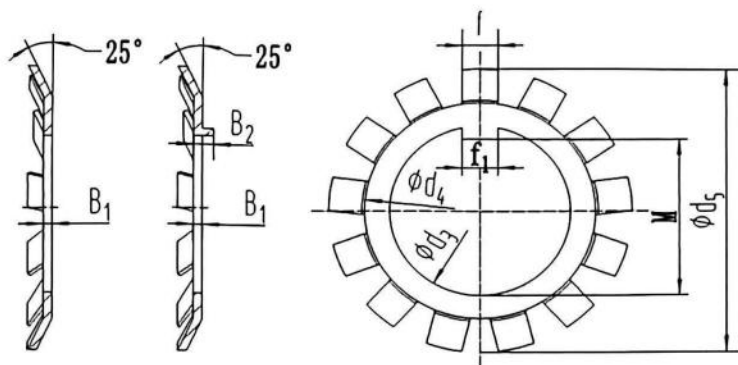

型号 Unit No		主要尺寸 Dimentions								外爪数 N min
MB型	MBA型	d_3	d_4	d_5	f_1	M	f	B_1	B_2	
mm										
MB29	MBA29	145	171	202	16	140	14	2	10	17
MB30	MBA30	150	171	205	16	145	14	2	10	17
MB31	MBA31	155	182	212	16	147.5	16	2.5	12	19
MB32	MBA32	160	182	217	18	154	16	2.5	12	19
MB33	MBA33	165	193	222	18	157.5	16	2.5	12	19
MB34	MBA34	170	193	232	18	164	16	2.5	12	19
MB36	MBA36	180	203	242	20	174	18	2.5	12	19
MB38	MBA38	190	214	252	20	184	18	2.5	12	19
MB40	MBA40	200	226	262	20	194	18	2.5	12	19
MB44	MBA44	220	250	292	24	213	20	3	—	19
MB48	MBA48	240	270	312	24	233	20	3	—	19
MB52	MBA52	260	300	342	28	253	24	3	—	19
MB56	MBA56	280	320	362	28	273	24	3	—	19
MBL24	MBAL24	120	135	151	14	115	12	2	6	19
MBL26	MBAL26	130	145	161	14	125	12	2	6	19
MBL28	MBAL28	140	155	171	16	135	14	2	8	19
MBL30	MBAL30	150	170	188	16	145	14	2	8	19
MBL32	MBAL32	160	180	199	18	154	16	2.5	8	19
MBL34	MBAL34	170	190	211	18	164	16	2.5	8	19
MBL36	MBAL36	180	200	221	20	174	18	2.5	8	19

◆ 产品参数


Product Parameters

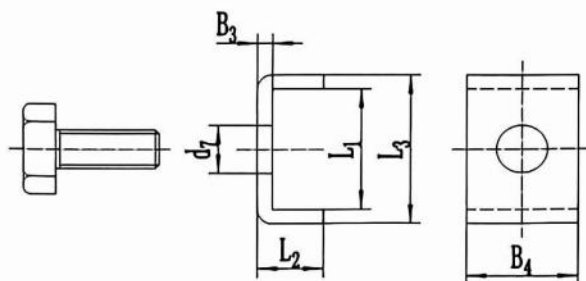

型号 Unit No	主要尺寸 Dimentions						螺栓 Screw
	B ₃	B ₄	L ₂	d ₇	L ₃	L ₁	
	mm						
MS44	4	20	12	9	30.5	22.5	M8×16
MS52	4	24	12	12	33.5	25.5	M10×20
MS60	4	24	12	12	38.5	30.5	M10×20
MS64	5	24	15	12	41	31	M10×20
MS68	5	28	15	14	48	38	M12×25
MS76	5	32	15	14	50	40	M12×25
MS80	5	32	15	18	55	45	M16×30
MS88	5	36	15	18	53	43	M16×30
MS96	5	36	15	18	63	53	M16×30
MS/500	5	40	15	18	55	45	M16×30
MS/530	7	40	21	22	65	51	M20×40
MS/560	7	45	21	22	68	54	M20×40
MS/630	7	50	21	22	75	61	M20×40
MS/670	7	50	21	22	80	66	M20×40
MS/710	7	55	21	26	83	69	M20×50
MS/750	7	60	21	26	84	70	M20×50
MS/850	7	70	21	26	85	71	M20×50
MS/900	7	70	21	26	90	76	M24×50
MS/950	7	70	21	26	92	78	M24×50
MS/1060	7	70	21	26	102	88	M24×50
MSL44	4	20	12	7	21.5	13.5	M6×12
MSL48	4	20	12	9	25.5	17.5	M8×16

◆ 产品参数

Product Parameters

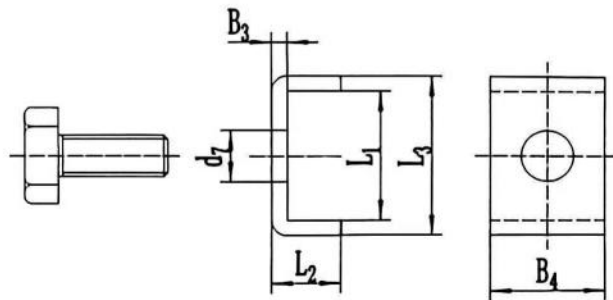

型号 Unit No	主要尺寸 Dimentions						螺栓 Screw
	B ₃	B ₄	L ₂	d ₇	L ₃	L ₁	
	mm						
MSL56	4	24	12	9	25.5	17.5	M8×16
MSL60	4	24	12	9	28.5	20.5	M8×16
MSL64	5	24	15	9	31	21	M8×16
MSL72	5	28	15	9	30	20	M8×16
MSL76	5	28	15	12	34	24	M10×20
MSL84	5	32	15	12	34	24	M10×20
MSL88	5	32	15	14	38	28	M12×25
MSL96	5	36	15	14	38	28	M12×25
MSL/530	7	40	21	18	48	34	M16×30
MSL/560	7	40	21	18	43	29	M16×30
MSL/630	7	45	21	18	48	34	M16×30
MSL/670	7	45	21	18	53	39	M16×30
MSL/710	7	50	21	18	53	39	M16×30
MSL/750	7	55	21	18	53	39	M16×30
MSL/850	7	60	21	22	58	44	M20×40
MSL/950	7	60	21	22	60	46	M20×40
MSL/1000	7	60	21	22	65	51	M20×40