




Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6000	100	10	26	8	4620	1960	0.020
6001	101	12	28	8	5070	2360	0.021
6002	102	15	32	9	5590	2850	0.032
6003	103	17	35	10	6050	3250	0.039
6004	104	20	42	12	9360	5000	0.070
6005	105	25	47	12	11200	6550	0.082
6006	106	30	55	13	13300	8300	0.124
6007	107	35	62	14	15900	10200	0.161
6008	108	40	68	15	16800	11600	0.197
6009	109	45	75	16	20800	14600	0.254
6010	110	50	80	16	21600	16000	0.279
6011	111	55	90	18	28100	21200	0.405
6012	112	60	95	18	29600	23200	0.428
6013	113	65	100	18	30700	25000	0.458
6014	114	70	110	20	37700	31000	0.635
6015	115	75	115	20	39700	33500	0.673
6016	116	80	125	22	47500	40000	0.877
6017	117	85	130	22	49400	43000	0.932
6018	118	90	140	24	58500	50000	1.190
6019	119	95	145	24	60500	54000	1.247
6020	120	100	150	24	60500	54000	1.340
6021	121	105	160	26	72800	65500	1.690
6022	122	110	170	28	81900	73500	2.023
6024	124	120	180	28	85200	80000	2.213
6026	126	130	200	33	104000	100000	3.270
6028	128	140	210	33	110000	109000	3.547
6030	130	150	225	35	131000	124000	4.880
6032	132	160	240	38	136000	135000	6.073
6034	134	170	260	42	168000	173000	7.175
6036	136	180	280	46	180000	184000	10.570
6038	138	190	290	46	188000	200000	11.08
6040	140	200	310	51	201000	222000	14.100
6044	144	220	340	56	247000	290000	18.500
6048	148	240	360	56	255000	315000	20.000
6052	152	260	400	65	291000	375000	28.500
6056	156	280	420	65	325000	420000	31.000
6060	160	300	460	74	355000	480000	43.500



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6202	202	15	35	11	7800	3750	0.044
6203	203	17	40	12	9560	4750	0.066
6204	204	20	47	14	12700	6550	0.109
6205	205	25	52	15	14000	7800	0.133
6206	206	30	62	16	19500	11200	0.200
6207	207	35	72	17	25500	15300	0.299
6208	208	40	80	18	30700	19000	0.379
6209	209	45	85	19	33200	21600	0.430
6210	210	50	90	20	35100	23200	0.475
6211	211	55	100	21	43600	29000	0.625
6212	212	60	110	22	47500	32500	0.797
6213	213	65	120	23	55900	40500	1.017
6214	214	70	125	24	60500	45000	1.110
6215	215	75	130	25	66300	49000	1.210
6216	216	80	140	26	70200	55000	1.460
6217	217	85	150	28	83200	64000	1.847
6218	218	90	160	30	95600	73500	2.223
6219	219	95	170	32	108000	81500	2.713
6220	220	100	180	34	124000	93000	3.321
6221	221	105	190	36	133000	104000	3.717
6222	222	110	200	38	143000	118000	4.340
6224	224	120	215	40	148000	131000	5.100
6226	226	130	230	40	156000	146000	5.615
6228	228	140	250	42	165000	150000	7.485
6230	230	150	270	45	174000	166000	9.475
6232	232	160	290	48	186000	186000	14.590
6234	234	170	310	52	212000	224000	17.570
6236	236	180	320	52	229000	240000	18.600
6238	238	190	340	55	255000	280000	22.800
6240	240	200	360	58	270000	310000	28.000
6244	244	220	400	65	296000	365000	32.400
6248	248	240	440	72	340000	431000	51.000
6252	252	260	480	80	390000	530000	65.500
6256	256	280	500	80	423000	600000	71.000
6260	260	300	540	85	441000	663000	89.500
6264	264	320	580	92	489000	744000	113.000
6268	268	340	620	92	511000	817000	131.000
6272	272	360	650	95	557000	904000	144.000
6276	276	380	680	95	584000	990000	162.000
6280	280	400	720	103	628000	1080000	197.000

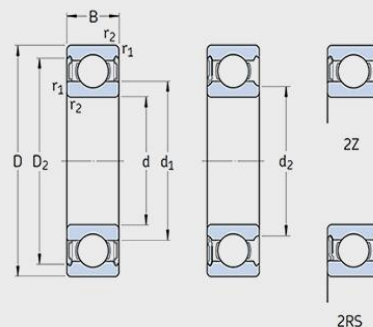

Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6300	300	10	35	11	8060	3400	0.054
6301	301	12	37	12	9750	4150	0.063
6302	302	15	42	13	11400	5400	0.087
6303	303	17	47	14	13500	6550	0.117
6304	304	20	52	15	15900	7800	0.153
6305	305	25	62	17	22500	11600	0.238
6306	306	30	72	19	28100	16000	0.360
6307	307	35	80	21	33200	19000	0.467
6308	308	40	90	23	41000	24000	0.640
6309	309	45	100	25	52700	31500	0.843
6310	310	50	110	27	61800	38000	1.097
6311	311	55	120	29	71500	45000	1.377
6312	312	60	130	31	81900	52000	1.733
6313	313	65	140	33	92300	60000	2.153
6314	314	70	150	35	104000	68000	2.560
6315	315	75	160	37	111400	76500	3.120
6316	316	80	170	39	124000	86500	3.680
6317	317	85	180	41	133000	96500	4.303
6318	318	90	190	43	143000	108000	4.967
6319	319	95	200	45	153000	118000	5.710
6320	320	100	215	47	174000	140000	7.633
6321	321	105	225	49	182000	153000	8.677
6322	322	110	240	50	203000	180000	9.603
6324	324	120	260	55	208000	186000	12.750
6326	326	130	280	58	230000	216000	18.400
6328	328	140	300	62	251000	245000	22.000
6330	330	150	320	65	276000	285000	23.000
6332	332	160	340	68	285000	300000	29.000
6334	334	170	360	72	312000	340000	34.500
6336	336	180	380	75	351000	405000	42.500
6338	338	190	400	78	371000	430000	49.000
6340	340	200	420	80	377000	465000	55.500
6344	344	220	460	88	410000	520000	60.800
6348	348	240	500	95	470000	624000	93.300
6352	352	260	540	102	531000	741000	116.000
6356	356	280	580	108	568000	845000	145.000
6360	360	300	620	109	593000	886000	169.000
6364	364	320	670	112	634000	1010000	207.000
6368	368	340	710	118	704000	1160000	238.000



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6405	405	25	80	21	35800	19300	0.530
6406	406	30	90	23	43600	23600	0.740
6407	407	35	100	25	55300	31000	0.950
6408	408	40	110	27	63700	36500	1.250
6409	409	45	120	29	76100	45000	1.550
6410	410	50	130	31	87100	52000	1.900
6411	411	55	140	33	99500	62000	2.300
6412	412	60	150	35	108000	69500	2.750
6413	413	65	160	37	119000	78000	3.300
6414	414	70	180	42	143000	10400	4.850
6415	415	75	190	45	153000	114000	6.800
6416	416	80	200	48	162000	125000	6.422
6417	417	85	210	52	174000	137000	9.500
6418	418	90	225	54	186000	150000	9.560
6419	419	95	240	55	188000	153000	11.000
6420	420	100	250	58	206000	175000	12.900
6421	421	105	260	60	222000	179000	16.800
6422	422	110	280	65	247000	227000	21.300
6424	424	120	310	72	291000	287000	29.000
6426	426	130	340	78	300000	298000	38.000



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
16003	7000103	17	35	8	6050	3250	0.032
16004	7000104	20	42	8	6890	4500	0.050
16005	7000105	25	47	8	7610	4750	0.060
16006	7000106	30	55	9	11200	7350	0.085
16007	7000107	35	62	9	12400	8150	0.110
16008	7000108	40	68	9	13300	9150	0.130
16009	7000109	45	75	10	15600	10800	0.170
16010	7000110	50	80	10	16300	11400	0.180
16011	7000111	55	90	11	19500	14000	0.260
16012	7000112	60	95	11	19900	15000	0.280
16013	7000113	65	100	11	21200	16600	0.300
16014	7000114	70	110	13	27800	25000	0.430
16015	7000115	75	115	13	28600	27000	0.460
16016	7000116	80	125	14	33200	31500	0.600
16017	7000117	85	130	14	33800	33500	0.630
16018	7000118	90	140	16	33500	33500	0.850
16019	7000119	95	145	16	34500	35000	0.890
16020	7000120	100	150	16	44200	44000	0.910
16021	7000121	105	160	18	52000	51000	1.200
16022	7000122	110	170	19	57200	57000	1.450
16024	7000124	120	180	19	60500	64000	1.600
16026	7000126	130	200	22	79300	81500	2.350
16028	7000128	140	210	22	80600	86500	2.500
16030	7000130	150	225	24	92300	98000	3.150
16032	7000132	160	240	25	99500	108000	3.700
16034	7000134	170	260	28	119000	129000	5.000
16036	7000136	180	280	31	138000	146000	6.600
16038	7000138	190	290	31	148000	166000	7.900
16040	7000140	200	310	34	168000	190000	8.850
16044	7000144	220	340	37	174000	204000	11.500
16048	7000148	240	360	37	178000	217000	12.100
16052	7000152	260	400	44	227000	299000	18.500
16056	7000156	280	420	44	232000	315000	23.000
16060	7000160	300	460	50	292000	410000	32.500
16064	7000164	320	480	50	300000	440000	34.200
16068	7000168	340	520	57	340000	515000	47.100
16072	7000172	360	540	57	350000	550000	49.300
16076	7000176	380	560	57	377000	620000	51.000
16080	7000180	400	600	63	358000	587000	65.000
16084	7000184	420	620	63	367000	617000	69.900
16088	7000188	440	650	67	407000	710000	81.700
16092	7000192	460	680	71	431000	767000	91.200
16096	7000196	480	700	71	444000	807000	98.500



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
61802	1000802	15	24	5	1560	800	0.007
61803	1000803	17	26	5	1680	930	0.008
61804	1000804	20	32	7	2700	1500	0.018
61805	1000805	25	37	7	4360	2600	0.022
61806	1000806	30	42	7	4490	2900	0.027
61807	1000807	35	47	7	4750	3200	0.030
61808	1000808	40	52	7	4940	3450	0.034
61809	1000809	45	58	7	6050	4300	0.040
61810	1000810	50	65	7	6240	4750	0.052
61811	1000811	55	72	9	8320	6200	0.083
61812	1000812	60	78	10	8710	6700	0.110
61813	1000813	65	85	10	12000	11500	0.130
61814	1000814	70	90	10	12100	11900	0.140
61815	1000815	75	95	10	12500	10800	0.150
61816	1000816	80	100	10	13300	12400	0.155
61817	1000817	85	110	13	19500	16600	0.270
61818	1000818	90	115	13	19900	17000	0.280
61819	1000819	95	120	13	19900	17600	0.300
61820	1000820	100	125	13	19900	18300	0.310
61821	1000821	105	130	13	20800	19600	0.320
61822	1000822	110	140	16	28100	30700	0.600
61824	1000824	120	150	16	29000	33000	0.650
61826	1000826	130	165	18	39000	43000	0.930
61828	1000828	140	175	18	40500	46500	0.990
61830	1000830	150	190	20	47500	54500	1.200
61832	1000832	160	200	20	49400	64000	1.300
61834	1000834	170	215	22	61800	78000	1.850
61836	1000836	180	225	22	62400	81500	2.000
61838	1000838	190	240	24	73000	88000	2.620
61840	1000840	200	250	24	76100	102000	2.700
61844	1000844	220	270	24	78000	110000	3.000
61848	1000848	240	300	28	98500	127000	4.600
61852	1000852	260	320	28	111000	163000	4.800
61856	1000856	280	350	33	138000	200000	7.400
61860	1000860	300	380	38	162000	210000	10.500
61864	1000864	320	400	38	168000	228000	10.900
61868	1000868	340	420	38	170000	236000	11.500
61872	1000872	360	440	38	187000	258000	12.300
61876	1000876	380	480	46	231000	340000	19.700
61880	1000880	400	500	46	235000	350000	20.600
61884	1000884	420	520	46	260000	405000	21.600
61888	1000888	440	540	46	264000	420000	22.500
61892	1000892	460	580	56	315000	515000	34.800
61896	1000896	480	600	56	325000	600000	36.500



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
61902	1000902	15	28	7	4030	2040	0.016
61903	1000903	17	30	7	4360	2320	0.018
61904	1000904	20	37	9	6370	3650	0.038
61905	1000905	25	42	9	6630	4000	0.045
61906	1000906	30	47	9	7280	4550	0.051
61907	1000907	35	55	10	9560	6200	0.080
61908	1000908	40	62	12	13800	9300	0.110
61909	1000909	45	68	12	10100	6700	0.140
61910	1000910	50	72	12	14600	10400	0.140
61911	1000911	55	80	13	15900	11400	0.190
61912	1000912	60	85	13	16500	12000	0.200
61913	1000913	65	90	13	17400	13400	0.220
61914	1000914	70	100	16	23800	18300	0.350
61915	1000915	75	105	16	24200	19300	0.370
61916	1000916	80	110	16	25100	20400	0.400
61917	1000917	85	120	18	32000	29600	0.517
61918	1000918	90	125	18	33000	31500	0.590
61919	1000919	95	130	18	33500	33500	0.680
61920	1000920	100	140	20	42300	41500	0.830
61922	1000920	110	150	20	43600	44500	0.900
61924	1000924	120	165	22	53000	57000	1.200
61926	1000926	130	180	24	65000	67000	1.600
61928	1000928	140	190	24	66300	71000	1.700
61930	1000930	150	210	28	85000	90500	2.470
61932	1000932	160	220	28	87000	96000	2.610
61934	1000934	170	230	28	86000	95500	2.740
61936	1000936	180	250	33	110000	119000	4.760
61940	1000940	200	280	38	148000	166000	7.400
61944	1000944	220	300	38	151000	180000	8.000
61948	1000948	240	320	38	170000	203000	8.280
61952	1000952	260	360	46	212000	270000	14.500
61956	1000956	280	380	46	216000	285000	15.500
61960	1000960	300	420	56	276000	375000	23.500
61964	1000964	320	440	56	285000	405000	24.800
61968	1000968	340	460	56	293000	430000	26.200
61972	1000972	360	480	56	300000	455000	27.500
61976	1000976	380	520	65	325000	510000	39.800
61980	1000980	400	540	65	335000	535000	41.600
61984	1000984	420	560	65	340000	560000	43.400
61988	1000988	440	600	74	365000	615000	60.000
61992	1000992	460	620	74	375000	645000	62.200
61996	1000996	480	650	78	430000	770000	73.000



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
16002 2RS	7000102 2RS	15	32	8	5590	2850	0.025
16003 2RS	7000103 2RS	17	35	8	6050	3250	0.032
16004 2RS	7000104 2RS	20	42	8	6890	4500	0.050
16005 2RS	7000105 2RS	25	47	8	7610	4750	0.060
16006 2RS	7000106 2RS	30	55	9	11200	7350	0.085
16007 2RS	7000107 2RS	35	62	9	12400	8150	0.110
16008 2RS	7000108 2RS	40	68	9	13300	9150	0.130
16009 2RS	7000109 2RS	45	75	10	15600	10800	0.170
16010 2RS	7000110 2RS	50	80	10	16300	11400	0.180
16011 2RS	7000111 2RS	55	90	11	19500	14000	0.260
16012 2RS	7000112 2RS	60	95	11	19900	15000	0.280
16013 2RS	7000113 2RS	65	100	11	21200	16600	0.300
16014 2RS	7000114 2RS	70	110	13	27800	25000	0.430
16015 2RS	7000115 2RS	75	115	13	28600	27000	0.460
16016 2RS	7000116 2RS	80	125	14	33200	31500	0.600
16017 2RS	7000117 2RS	85	130	14	33800	33500	0.630
16018 2RS	7000118 2RS	90	140	16	33500	33500	0.850
16019 2RS	7000119 2RS	95	145	16	34500	33500	0.890



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6000 2RS	180100	10	26	8	4620	1960	0.020
6001 2RS	180101	12	28	8	5070	2360	0.021
6002 2RS	180102	15	32	9	5590	2850	0.032
6003 2RS	180103	17	35	10	6050	3250	0.039
6004 2RS	180104	20	42	12	9360	5000	0.070
6005 2RS	180105	25	47	12	11200	6550	0.082
6006 2RS	180106	30	55	13	13300	8300	0.124
6007 2RS	180107	35	62	14	15900	10200	0.161
6008 2RS	180108	40	68	15	16800	11600	0.197
6009 2RS	180109	45	75	16	20800	14600	0.254
6010 2RS	180110	50	80	16	21600	16000	0.279
6011 2RS	180111	55	90	18	28100	21200	0.405
6012 2RS	180112	60	95	18	29600	23200	0.428
6013 2RS	180113	65	100	18	30700	25000	0.458
6014 2RS	180114	70	110	20	37700	31000	0.635
6015 2RS	180115	75	115	20	39700	33500	0.673
6016 2RS	180116	80	125	22	47500	40000	0.877
6017 2RS	180117	85	130	22	49400	43000	0.932
6018 2RS	180118	90	140	24	58500	50000	1.190
6019 2RS	180119	95	145	24	60500	54000	1.247
6020 2RS	180120	100	150	24	60500	54000	1.340
6021 2RS	180121	105	160	26	72800	65500	1.690
6022 2RS	180122	110	170	28	81900	73500	2.023
6024 2RS	180124	120	180	28	85200	80000	2.213
6026 2RS	180126	130	200	33	104000	100000	3.270
6028 2RS	180128	140	210	33	110000	109000	3.547
6030 2RS	180130	150	225	35	131000	124000	4.880
6032 2RS	180132	160	240	38	136000	135000	6.073



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
61800 2RS	1000800 2RS	10	19	5	1380	585	0.006
61801 2RS	1000801 2RS	12	21	5	1430	670	0.006
61802 2RS	1000802 2RS	15	24	5	1560	800	0.007
61803 2RS	1000803 2RS	17	26	5	1680	930	0.008
61804 2RS	1000804 2RS	20	32	7	2700	1500	0.018
61805 2RS	1000805 2RS	25	37	7	4360	2600	0.022
61806 2RS	1000806 2RS	30	42	7	4490	2900	0.027
61807 2RS	1000807 2RS	35	47	7	4750	3200	0.030
61808 2RS	1000808 2RS	40	52	7	4940	3450	0.034
61809 2RS	1000809 2RS	45	58	7	6050	4300	0.040
61810 2RS	1000810 2RS	50	65	7	6240	4750	0.052
61811 2RS	1000811 2RS	55	72	9	8320	6200	0.083
61812 2RS	1000812 2RS	60	78	10	8710	6700	0.110
61813 2RS	1000813 2RS	65	85	10	12000	11500	0.130
61814 2RS	1000814 2RS	70	90	10	12100	11900	0.140
61815 2RS	1000815 2RS	75	95	10	12500	10800	0.150
61816 2RS	1000816 2RS	80	100	10	13300	12400	0.155
61817 2RS	1000817 2RS	85	110	13	19500	16600	0.270
61818 2RS	1000818 2RS	90	115	13	19900	17000	0.280
61819 2RS	1000819 2RS	95	120	13	19900	17600	0.300
61820 2RS	1000820 2RS	100	125	13	19900	18300	0.310
61821 2RS	1000821 2RS	105	130	13	20800	19600	0.320
61822 2RS	1000822 2RS	110	140	16	28100	30700	0.600
61824 2RS	1000824 2RS	120	150	16	29000	33000	0.650
61826 2RS	1000826 2RS	130	165	18	39000	43000	0.930
61828 2RS	1000828 2RS	140	175	18	40500	46500	0.990



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
61900 2RS	1000900 2RS	10	22	6	1950	750	0.010
61901 2RS	1000901 2RS	12	24	6	2250	980	0.011
61902 2RS	1000902 2RS	15	28	7	4030	2040	0.016
61903 2RS	1000903	17	30	7	4360	2320	0.018
61904 2RS	1000904 2RS	20	37	9	6370	3650	0.038
61905 2RS	1000905 2RS	25	42	9	6630	4000	0.045
61906 2RS	1000906	30	47	9	7280	4550	0.051
61907 2RS	1000907 2RS	35	55	10	9560	6200	0.080
61908 2RS	1000908 2RS	40	62	12	13800	9300	0.110
61909 2RS	1000909 2RS	45	68	12	10100	6700	0.140
61910 2RS	1000910 2RS	50	72	12	14600	10400	0.140
61911 2RS	1000911 2RS	55	80	13	15900	11400	0.190
61912 2RS	1000912 2RS	60	85	13	16500	12000	0.200
61913 2RS	1000913 2RS	65	90	13	17400	13400	0.220
61914 2RS	1000914 2RS	70	100	16	23800	18300	0.350
61915 2RS	1000915 2RS	75	105	16	24200	19300	0.370
61916 2RS	1000916 2RS	80	110	16	25100	20400	0.400
61917 2RS	1000917 2RS	85	120	18	32000	29600	0.517
61918 2RS	1000918 2RS	90	125	18	33000	31500	0.590



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6202 2RS	180202	15	35	11	7800	3750	0.044
6203 2RS	180203	17	40	12	9560	4750	0.066
6204 2RS	180204	20	47	14	12700	6550	0.109
6205 2RS	180205	25	52	15	14000	7800	0.133
6206 2RS	180206	30	62	16	19500	11200	0.200
6207 2RS	180207	35	72	17	25500	15300	0.299
6208 2RS	180208	40	80	18	30700	19000	0.379
6209 2RS	180209	45	85	19	33200	21600	0.430
6210 2RS	180210	50	90	20	35100	23200	0.475
6211 2RS	180211	55	100	21	43600	29000	0.625
6212 2RS	180212	60	110	22	47500	32500	0.797
6213 2RS	180213	65	120	23	55900	40500	1.017
6214 2RS	180214	70	125	24	60500	45000	1.110
6215 2RS	180215	75	130	25	66300	49000	1.210
6216 2RS	180216	80	140	26	70200	55000	1.460
6217 2RS	180217	85	150	28	83200	64000	1.847
6218 2RS	180218	90	160	30	95600	73500	2.223
6219 2RS	180219	95	170	32	108000	81500	2.713
6220 2RS	180220	100	180	34	124000	93000	3.321
62200 2RS	180500	10	30	14	5100	2400	0.045
62201 2RS	180501	12	32	14	6900	3100	0.048
62202 2RS	180502	15	35	14	7800	3750	0.054
62203 2RS	180503	17	40	16	9500	4750	0.083
62204 2RS	180504	20	47	18	12700	6550	0.130
62205 2RS	180505	25	52	18	14000	7800	0.150
62206 2RS	180506	30	62	20	16500	11200	0.243
62207 2RS	180507	35	72	23	25500	15300	0.388
62208 2RS	180508	40	80	23	30700	19000	0.471
62209 2RS	180509	45	85	23	33200	21600	0.523
6221 2RS	180221	105	190	36	133000	105000	3.717
62210 2RS	180510	50	90	23	35100	23200	0.550
62211 2RS	180511	55	100	25	43600	29000	0.700
62212 2RS	180512	60	110	28	47500	32500	0.970
62213 2RS	180513	65	120	31	55900	40500	1.250
62214 2RS	180514	70	125	31	60500	45000	1.300
6222 2RS	180222	110	200	38	143000	118000	4.340
6224 2RS	180224	120	215	40	148000	131000	5.100
62300 2RS	180600	10	35	17	8000	3400	0.060
62301 2RS	180601	12	37	17	9750	4150	0.070
62302 2RS	180602	15	42	17	11400	5400	0.110
62303 2RS	180603	17	47	19	13500	6550	0.150
62304 2RS	180604	20	52	21	15900	7800	0.207
62305 2RS	180605	25	62	24	22500	11600	0.326
62306 2RS	180606	30	72	27	28100	16000	0.493
62307 2RS	180607	35	80	31	33200	19000	0.680
62308 2RS	180608	40	90	33	41000	24000	0.890
62309 2RS	180609	45	100	36	52700	31500	1.190
62310 2RS	180610	50	110	40	61800	38000	1.500



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6300 2RS	180300	10	35	11	8060	3400	0.054
6301 2RS	180301	12	37	12	9750	4150	0.063
6302 2RS	180302	15	42	13	11400	5400	0.087
6303 2RS	180303	17	47	14	13500	6550	0.117
6304 2RS	180304	20	52	15	15900	7800	0.153
6305 2RS	180305	25	62	17	22500	11600	0.238
6306 2RS	180306	30	72	19	28100	16000	0.360
6307 2RS	180307	35	80	21	33200	19000	0.467
6308 2RS	180308	40	90	23	41000	24000	0.640
6309 2RS	180309	45	100	25	52700	31500	0.843
6310 2RS	180310	50	110	27	61800	38000	1.097
6311 2RS	180311	55	120	29	71500	45000	1.377
6312 2RS	180312	60	130	31	81900	52000	1.733
6313 2RS	180313	65	140	33	92300	60000	2.153
6314 2RS	180314	70	150	35	104000	68000	2.560
6315 2RS	180315	75	160	37	111400	76500	3.120
6316 2RS	180316	80	170	39	124000	86500	3.680
6317 2RS	180317	85	180	41	133000	96500	4.303
6318 2RS	180318	90	190	43	143000	108000	4.967
6319 2RS	180319	95	200	45	153000	118000	5.710
6320 2RS	180320	100	215	47	174000	140000	7.633
6321 2RS	180321	105	225	49	182000	153000	8.677
6322 2RS	180322	110	240	50	203000	180000	9.603
6403 2RS	180403	17	62	17	22900	10800	0.270
6404 2RS	180404	20	72	19	31000	15200	0.400
6405 2RS	180405	25	80	21	35800	19300	0.530
6406 2RS	180406	30	90	23	43600	23600	0.740
6407 2RS	180407	35	100	25	55300	31000	0.950
6408 2RS	180408	40	110	27	63700	36500	1.250
6409 2RS	180409	45	120	29	76100	45000	1.550
6410 2RS	180410	50	130	31	87100	52000	1.900
6411 2RS	180411	55	140	33	99500	62000	2.300
6412 2RS	180412	60	150	35	108000	69500	2.750
6413 2RS	180413	65	160	37	119000	78000	3.300
6414 2RS	180414	70	180	42	143000	10400	4.850
6415 2RS	180415	75	190	45	153000	114000	6.800
6416 2RS	180416	80	200	48	162000	125000	6.422
6417 2RS	180417	85	210	52	174000	137000	9.500
6418 2RS	180418	90	225	54	186000	150000	9.560
6419 2RS	180419	95	240	55	188000	153000	11.000
6420 2RS	180420	100	250	58	206000	175000	12.900



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
16002 ZZ	7000102 ZZ	15	32	8	5590	2850	0.025
16003 ZZ	7000103 ZZ	17	35	8	6050	3250	0.032
16004 ZZ	7000104 ZZ	20	42	8	6890	4500	0.050
16005 ZZ	7000105 ZZ	25	47	8	7610	4750	0.060
16006 ZZ	7000106 ZZ	30	55	9	11200	7350	0.085
16007 ZZ	7000107 ZZ	35	62	9	12400	8150	0.110
16008 ZZ	7000108 ZZ	40	68	9	13300	9150	0.130
16009 ZZ	7000109 ZZ	45	75	10	15600	10800	0.170
16010 ZZ	7000110 ZZ	50	80	10	16300	11400	0.180
16011 ZZ	7000111 ZZ	55	90	11	19500	14000	0.260
16012 ZZ	7000112 ZZ	60	95	11	19900	15000	0.280
16013 ZZ	7000113 ZZ	65	100	11	21200	16600	0.300
16014 ZZ	7000114 ZZ	70	110	13	27800	25000	0.430
16015 ZZ	7000115 ZZ	75	115	13	28600	27000	0.460
16016 ZZ	7000116 ZZ	80	125	14	33200	31500	0.600
16017 ZZ	7000117 ZZ	85	130	14	33800	33500	0.630
16018 ZZ	7000118 ZZ	90	140	16	33500	33500	0.850
16019 ZZ	7000119 ZZ	95	145	16	34500	35000	0.890
16020 ZZ	7000120 ZZ	100	150	16	35000	36500	0.910



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6000 ZZ	80100	10	26	8	4620	1960	0.020
6001 ZZ	80101	12	28	8	5070	2360	0.021
6002 ZZ	80102	15	32	9	5590	2850	0.032
6003 ZZ	80103	17	35	10	6050	3250	0.039
6004 ZZ	80104	20	42	12	9360	5000	0.070
6005 ZZ	80105	25	47	12	11200	6550	0.082
6006 ZZ	80106	30	55	13	13300	8300	0.124
6007 ZZ	80107	35	62	14	15900	10200	0.161
6008 ZZ	80108	40	68	15	16800	11600	0.197
6009 ZZ	80109	45	75	16	20800	14600	0.254
6010 ZZ	80110	50	80	16	21600	16000	0.279
6011 ZZ	80111	55	90	18	28100	21200	0.405
6012 ZZ	80112	60	95	18	29600	23200	0.428
6013 ZZ	80113	65	100	18	30700	25000	0.458
6014 ZZ	80114	70	110	20	37700	31000	0.635
6015 ZZ	80115	75	115	20	39700	33500	0.673
6016 ZZ	80116	80	125	22	47500	40000	0.877
6017 ZZ	80117	85	130	22	49400	43000	0.932
6018 ZZ	80118	90	140	24	58500	50000	1.190
6019 ZZ	80119	95	145	24	60500	54000	1.247
6020 ZZ	80120	100	150	24	60500	54000	1.340
6021 ZZ	80121	105	160	26	72800	65500	1.690
6022 ZZ	80122	110	170	28	81900	73500	2.023
6024 ZZ	80124	120	180	28	85200	80000	2.213
6026 ZZ	80126	130	200	33	104000	100000	3.270
6028 ZZ	80128	140	210	33	110000	109000	3.547
6030 ZZ	80130	150	225	35	131000	124000	4.880
6032 ZZ	80132	160	240	38	136000	135000	6.073
6034 ZZ	80134	170	260	42	168000	173000	7.175
6036 ZZ	80136	180	280	46	180000	184000	10.570
6038 ZZ	80138	190	290	46	188000	200000	11.080
6040 ZZ	80140	200	310	51	201000	222000	14.100



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
61800 ZZ	1000800 ZZ	10	19	5	1380	585	0.006
61801 ZZ	1000801 ZZ	12	21	5	1430	670	0.006
61802 ZZ	1000802 ZZ	15	24	5	1560	800	0.007
61803 ZZ	1000803 ZZ	17	26	5	1680	930	0.008
61804 ZZ	1000804 ZZ	20	32	7	2700	1500	0.018
61805 ZZ	1000805 ZZ	25	37	7	4360	2600	0.022
61806 ZZ	1000806 ZZ	30	42	7	4490	2900	0.027
61807 ZZ	1000807 ZZ	35	47	7	4750	3200	0.030
61808 ZZ	1000808 ZZ	40	52	7	4940	3450	0.034
61809 ZZ	1000809 ZZ	45	58	7	6050	4300	0.040
61810 ZZ	1000810 ZZ	50	65	7	6240	4750	0.052
61811 ZZ	1000811 ZZ	55	72	9	8320	6200	0.083
61812 ZZ	1000812 ZZ	60	78	10	8710	6700	0.110
61813 ZZ	1000813 ZZ	65	85	10	12000	11500	0.130
61814 ZZ	1000814 ZZ	70	90	10	12100	11900	0.140
61815 ZZ	1000815 ZZ	75	95	10	12500	10800	0.150
61816 ZZ	1000816 ZZ	80	100	10	13300	12400	0.155
61817 ZZ	1000817 ZZ	85	110	13	19500	16600	0.270
61818 ZZ	1000818 ZZ	90	115	13	19900	17000	0.280
61819 ZZ	1000819 ZZ	95	120	13	19900	17600	0.300
61820 ZZ	1000820 ZZ	100	125	13	19900	18300	0.310
61821 ZZ	1000821 ZZ	105	130	13	20800	19600	0.320
61822 ZZ	1000822 ZZ	110	140	16	28100	30700	0.600
61824 ZZ	1000824 ZZ	120	150	16	29000	33000	0.650
61826 ZZ	1000826 ZZ	130	165	18	39000	43000	0.930
61828 ZZ	1000828 ZZ	140	175	18	40500	46500	0.990
61830 ZZ	1000830 ZZ	150	190	20	47500	54500	1.200
61832 ZZ	1000832 ZZ	160	200	20	49400	64000	1.300
61834 ZZ	1000834 ZZ	170	215	22	61800	78000	1.850
61836 ZZ	1000836 ZZ	180	225	22	62400	81500	2.000
61838 ZZ	1000838 ZZ	190	240	24	73000	88000	2.620



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
61900 ZZ	1000900 ZZ	10	22	6	1950	750	0.010
61901 ZZ	1000901 ZZ	12	24	6	2250	980	0.011
61902 ZZ	1000902 ZZ	15	28	7	4030	2040	0.016
61903 ZZ	1000903 ZZ	17	30	7	4360	2320	0.018
61904 ZZ	1000904 ZZ	20	37	9	6370	3650	0.038
61905 ZZ	1000905 ZZ	25	42	9	6630	4000	0.045
61906 ZZ	1000906 ZZ	30	47	9	7280	4550	0.051
61907 ZZ	1000907 ZZ	35	55	10	9560	6200	0.080
61908 ZZ	1000908 ZZ	40	62	12	13800	9300	0.110
61909 ZZ	1000909 ZZ	45	68	12	10100	6700	0.140
61910 ZZ	1000910 ZZ	50	72	12	14600	10400	0.140
61911 ZZ	1000911 ZZ	55	80	13	15900	11400	0.190
61912 ZZ	1000912 ZZ	60	85	13	16500	12000	0.200
61913 ZZ	1000913 ZZ	65	90	13	17400	13400	0.220
61914 ZZ	1000914 ZZ	70	100	16	23800	18300	0.350
61915 ZZ	1000915 ZZ	75	105	16	24200	19300	0.370
61916 ZZ	1000916 ZZ	80	110	16	25100	20400	0.400
61917 ZZ	1000917 ZZ	85	120	18	32000	29600	0.517
61918 ZZ	1000918 ZZ	90	125	18	33000	31500	0.590
61919 ZZ	1000919 ZZ	95	130	18	33500	33500	0.680
61920 ZZ	1000920 ZZ	100	140	20	42300	41500	0.830
61922 ZZ	1000920 ZZ	110	150	20	43600	44500	0.900
61924 ZZ	1000924 ZZ	120	165	22	53000	57000	1.129
61926 ZZ	1000926 ZZ	130	180	24	65000	67000	1.780
61928 ZZ	1000928 ZZ	140	190	24	66300	71000	1.900
61930 ZZ	1000930 ZZ	150	210	28	85000	90500	2.640



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6200 ZZ	80200	10	30	9	5070	2360	0.031
6201 ZZ	80201	12	32	10	6890	3100	0.038
6202 ZZ	80202	15	35	11	7800	3750	0.044
6203 ZZ	80203	17	40	12	9560	4750	0.066
6204 ZZ	80204	20	47	14	12700	6550	0.109
6205 ZZ	80205	25	52	15	14000	7800	0.133
6206 ZZ	80206	30	62	16	19500	11200	0.200
6207 ZZ	80207	35	72	17	25500	15300	0.299
6208 ZZ	80208	40	80	18	30700	19000	0.379
6209 ZZ	80209	45	85	19	33200	21600	0.430
6210 ZZ	80210	50	90	20	35100	23200	0.475
6211 ZZ	80211	55	100	21	43600	29000	0.625
6212 ZZ	80212	60	110	22	47500	32500	0.797
6213 ZZ	80213	65	120	23	55900	40500	1.017
6214 ZZ	80214	70	125	24	60500	45000	1.110
6215 ZZ	80215	75	130	25	66300	49000	1.210
6216 ZZ	80216	80	140	26	70200	55000	1.460
6217 ZZ	80217	85	150	28	83200	64000	1.847
6218 ZZ	80218	90	160	30	95600	73500	2.223
6219 ZZ	80219	95	170	32	108000	81500	2.713
6220 ZZ	80220	100	180	34	124000	93000	3.321
6221 ZZ	80221	105	190	36	133000	104000	3.717
6222 ZZ	80222	110	200	38	143000	118000	4.340
6224 ZZ	80224	120	215	40	148000	131000	5.100
6226 ZZ	80226	130	230	40	156000	146000	5.615
6228 ZZ	80228	140	250	42	165000	150000	7.485
6230 ZZ	80230	150	270	45	174000	166000	9.475
6232 ZZ	80232	160	290	48	186000	186000	14.590
6234 ZZ	80234	170	310	52	212000	224000	17.570
6236 ZZ	80236	180	320	52	229000	240000	18.600



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6300 ZZ	80300	10	35	11	8060	3400	0.054
6301 ZZ	80301	12	37	12	9750	4150	0.063
6302 ZZ	80302	15	42	13	11400	5400	0.087
6303 ZZ	80303	17	47	14	13500	6550	0.117
6304 ZZ	80304	20	52	15	15900	7800	0.153
6305 ZZ	80305	25	62	17	22500	11600	0.238
6306 ZZ	80306	30	72	19	28100	16000	0.360
6307 ZZ	80307	35	80	21	33200	19000	0.467
6308 ZZ	80308	40	90	23	41000	24000	0.640
6309 ZZ	80309	45	100	25	52700	31500	0.843
6310 ZZ	80310	50	110	27	61800	38000	1.097
6311 ZZ	80311	55	120	29	71500	45000	1.377
6312 ZZ	80312	60	130	31	81900	52000	1.733
6313 ZZ	80313	65	140	33	92300	60000	2.153
6314 ZZ	80314	70	150	35	104000	68000	2.560
6315 ZZ	80315	75	160	37	111400	76500	3.120
6316 ZZ	80316	80	170	39	124000	86500	3.680
6317 ZZ	80317	85	180	41	133000	96500	4.303
6318 ZZ	80318	90	190	43	143000	108000	4.967
6319 ZZ	80319	95	200	45	153000	118000	5.710
6320 ZZ	80320	100	215	47	174000	140000	7.633
6321 ZZ	80321	105	225	49	182000	153000	8.677
6322 ZZ	80322	110	240	50	203000	180000	9.603
6324 ZZ	80324	120	260	55	208000	186000	12.750
6326 ZZ	80326	130	280	58	230000	216000	18.400
6328 ZZ	80328	140	300	62	251000	245000	22.000



Bearing No.		Dimensions (mm)			Basic Load Rating (N)		Weight (kg)
ISO	GOST	d	D	B	Dyn. C	Stat. C0	
6403 ZZ	80403	17	62	17	22900	10800	0.270
6404 ZZ	80404	20	72	19	31000	15200	0.400
6405 ZZ	80405	25	80	21	35800	19300	0.530
6406 ZZ	80406	30	90	23	43600	23600	0.740
6407 ZZ	80407	35	100	25	55300	31000	0.950
6408 ZZ	80408	40	110	27	63700	36500	1.250
6409 ZZ	80409	45	120	29	76100	45000	1.550
6410 ZZ	80410	50	130	31	87100	52000	1.900
6411 ZZ	80411	55	140	33	99500	62000	2.300
6412 ZZ	80412	60	150	35	108000	69500	2.750
6413 ZZ	80413	65	160	37	119000	78000	3.300
6414 ZZ	80414	70	180	42	143000	10400	4.850
6415 ZZ	80415	75	190	45	153000	114000	6.800
6416 ZZ	80416	80	200	48	162000	125000	6.422
6417 ZZ	80417	85	210	52	174000	137000	9.500
6418 ZZ	80418	90	225	54	186000	150000	9.560
6419 ZZ	80419	95	240	55	188000	153000	11.000
6420 ZZ	80420	100	250	58	206000	175000	12.900